

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 February 2001 (15.02.2001)

PCT

(10) International Publication Number
WO 01/10369 A1

- (51) International Patent Classification⁷: A61F 11/04, 2/18 (74) Agent: FREEHILLS CARTER SMITH BEADLE; 101 Collins Street, Melbourne, VIC 3000 (AU).
- (21) International Application Number: PCT/AU00/00936
- (22) International Filing Date: 7 August 2000 (07.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PQ 2071 6 August 1999 (06.08.1999) AU
- (71) Applicant (for all designated States except US): THE UNIVERSITY OF MELBOURNE [AU/AU]; Grattan Street, Parkville, VIC 3052 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CLARK, Graeme, Melbourne [AU/AU]; 13 Banoon Road, Eltham, VIC 3095 (AU). PYMAN, Brian, Clive [AU/AU]; 53 Victoria Crescent, Mont Albert, VIC 3127 (AU). O'LEARY, Stephen, John [AU/AU]; 1104 Whitehorse Road, Box Hill, VIC 3128 (AU).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IMPROVED COCHLEAR IMPLANT PACKAGE

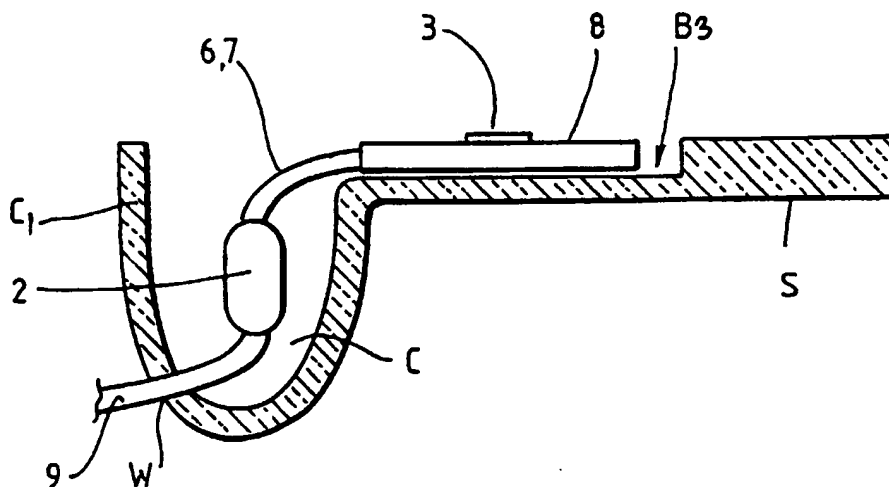

(57) Abstract: An implant package for a cochlear implant, including stimulator electronics contained within a protective housing (2) and being coupled to an electrode array (9) for insertion into the cochlea of a patient, and being further coupled to a receiving and/or transmitting coil (8) enclosed within a protective casing, said protective housing being dimensioned and shaped to be capable of location within the mastoid cavity (C) of the patient nearer to the entry point of the electrode array to the cochlea, said further coupling being contained in a flexible connection between the protective housing (2) and the protective casing (8).

WO 01/10369 A1

IMPROVED COCHLEAR IMPLANT PACKAGE

Field of the Invention

This invention relates to improvements in cochlear implants, and more particularly to improvements relating to the shapes of implant packages, e.g. receiver-stimulator packages, to enable the cochlear implant to be positioned in a patient in a more desirable location than the location presently used.

Background of the Invention

Present cochlear implant receiver-stimulators are placed in a patient by drilling a bed into and through the posterior section of the mastoid bone lying behind the ear. The bed is usually made by drilling the bone down to the lining of the brain or dura mater. The receiver-stimulator of the Nucleus cochlear implant made by Cochlear Limited has a receiver-stimulator package made from titanium which houses the stimulation electronics and which is fitted into the bed in the mastoid bone. A receiver coil extends from the back end of the package and lies superficial to the bone. Other cochlear implants have included packages made from ceramic material and these are usually placed completely within a bed drilled down to the lining of the brain, especially in young children.

In young children, placing either of the above packages in the mastoid bone some distance behind the ear can lead to the packages creating an external swelling, which can be unsightly. More importantly, such placements of the package can lead to serious damage caused by excessive impact to the head in the area adjacent the implant. Such impact can lead to fractures of the electrode where it exits the package, or cracking or damage of the package itself. In addition, because the packages are placed in this particular location, especially where a bed is drilled down to the lining of the brain, it is possible for excessive impact to cause the package to enter the cranial cavity and damage structures including the brain.

- 2 -

Summary of the Invention and Object

It is an object of the present invention to provide an improved implant package for a cochlear implant shaped to be received in a more desirable location within the skull of the patient.

5 The invention provides an implant package for a cochlear implant, said implant package including stimulator electronics contained within a protective housing and being operably coupled to an electrode array adapted for insertion into the cochlea of the patient, and being further operably coupled to a receiving and/or transmitting coil enclosed within a protective casing, said protective
10 housing being dimensioned and shaped to be capable of location within the mastoid cavity of the patient nearer to the entry point of the electrode array to the cochlea, said further coupling being contained in a flexible connection between the protective housing and the protective casing.

By positioning the implant electronics housing in this way, the housing is
15 less exposed to the risk of trauma caused by excessive blows to the head as it lies below the surface of the skull bone and is therefore less susceptible to a direct blow, and is additionally protected by the overlying pinna. The flexible coupling enables the coil to be placed in an optimal position and, depending on the anatomy and the age of the person, over time the coupling would adjust to
20 any changes in head shape.

Advantageously, the implant package is electrically coupled to the electrode array and is further electrically coupled to the receiving and/or transmitting coil.

In a preferred form, the flexible coupling is made from a material having
25 memory so that the coupling retains its desired shape when installed in the mastoid cavity. The flexible connection can include one or more flexible arms which contain the electrical leads for connecting the implant electronics in the protective housing to the transmitter/receiver coil. While two arms are shown in the preferred embodiment, one arm may have the advantage of reducing the
30 inductive effects between the leads within the arms and the magnetic coil of the transmitter/receiver.

- 3 -

The implant package is preferably a receiver-stimulator package for a cochlear implant.

Brief Description of the Invention

5 A preferred embodiment of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 schematically illustrates one embodiment, and

Figure 2 is a schematic cross section illustrating the positioning of the protective casing and the protective housing relative to the ear canal, the
10 mastoid cavity and the drilled bed in the skull.

Description of the Preferred Embodiment

Anatomical dissections show that there is a gutter lying between the sigmoid sinus, posterior osseous ear canal, the mastoid tip and the floor of
15 middle fossa where an appropriately shaped housing for the implant unit can be placed so that the housing is not exposed above the surface of the bone.

As illustrated in the drawings, the housing 2 comprises a narrow elongate rectangular housing having rounded ends, somewhat like a flattened ovoid or lozenge shape, which is received in the mastoid cavity C referred to above
20 adjacent the ear canal C₁. The housing 2 may be made from titanium, similar to the Nucleus device, or from cast or moulded ceramic material.

As described above, the protective housing 2 for the implant electronics, in this case the receiver-stimulator electronics, is connected by suitable leads 4, 5 to a transmitter/receiver coil 3, the leads 4, 5 being contained within flexible
25 arms 6, 7 of inert material such as silicone rubber. If desired, the arms 6, 7 can be formed from or incorporate a material having memory so that the arms retain their manufactured shape after installation.

The coil 3 is enclosed within a protective casing 8, which is received in a drilled bed B₃ in the mastoid bone behind the ear. Suitably shaped beds B₁, B₂
30 connecting the mastoid cavity and the drilled bed B₃ with the skull S receive the flexible arms 6, 7 containing the connecting leads 4, 5. A further lead 9 extends

- 3 -

The implant package is preferably a receiver-stimulator package for a cochlear implant.

Brief Description of the Invention

5 A preferred embodiment of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 schematically illustrates one embodiment, and

Figure 2 is a schematic cross section illustrating the positioning of the protective casing and the protective housing relative to the ear canal, the
10 mastoid cavity and the drilled bed in the skull.

Description of the Preferred Embodiment

Anatomical dissections show that there is a gutter lying between the sigmoid sinus, posterior osseous ear canal, the mastoid tip and the floor of
15 middle fossa where an appropriately shaped housing for the implant unit can be placed so that the housing is not exposed above the surface of the bone.

As illustrated in the drawings, the housing 2 comprises a narrow elongate rectangular housing having rounded ends, somewhat like a flattened ovoid or lozenge shape, which is received in the mastoid cavity C referred to above
20 adjacent the ear canal C₁. The housing 2 may be made from titanium, similar to the Nucleus device, or from cast or moulded ceramic material.

As described above, the protective housing 2 for the implant electronics, in this case the receiver-stimulator electronics, is connected by suitable leads 4, 5 to a transmitter/receiver coil 3, the leads 4, 5 being contained within flexible
25 arms 6, 7 of inert material such as silicone rubber. If desired, the arms 6, 7 can be formed from or incorporate a material having memory so that the arms retain their manufactured shape after installation.

The coil 3 is enclosed within a protective casing 8, which is received in a drilled bed B₃ in the mastoid bone behind the ear. Suitably shaped beds B₁, B₂
30 connecting the mastoid cavity and the drilled bed B₃ with the skull S receive the flexible arms 6, 7 containing the connecting leads 4, 5. A further lead 9 extends

- 4 -

from the housing 2 into the ear canal C_1 through a window W and terminates in an electrode array (not shown) which is implanted in the cochlea.

Since the receiver-stimulator housing 2 is located in the mastoid cavity C, below the surface of the bone, it is less susceptible to damage and is
5 protected and hidden by the overlying pinna. The flexible arm(s) 6, 7 allow optional positioning of the coil and permit changes in head shape.

The receiver-stimulator electronics, the transmitter/receiver coil, and the electrode array for implantation in the cochlea of the patient are configured in accordance with the patent literature relating to the cochlear implant technology
10 and do not form any part of the present invention.

While one preferred shape for the protective housing has been described above, it will be appreciated that different shapes, which are capable of lying wholly within the gutter forming part of the mastoid cavity, can be adopted without departing from the essence of the invention defined above.

15 It is also envisaged that whilst the above embodiment is described with reference to a conventional cochlear implant system, i.e. one with a receiver-stimulator that receives coded signals from an external unit and provides stimulation to the cochlea accordingly, the present invention could equally be applied to a totally implanted cochlear implant system. In such a system the
20 implant unit has the capability of functioning without the need for any external devices, at least for a defined period of time.

- 5 -

CLAIMS:

1. An implant package for a cochlear implant, said implant package including stimulator electronics contained within a protective housing and being operably coupled to an electrode array adapted for insertion into the cochlea of the patient, and being further operably coupled to a receiving and/or transmitting coil enclosed within a protective casing, said protective housing being dimensioned and shaped to be capable of location within the mastoid cavity of the patient nearer to the entry point of the electrode array to the cochlea, said further coupling being contained in a flexible connection between the protective housing and the protective casing.
2. The implant package of claim 1, wherein the flexible connection facilitates optimal positioning of the coil, depending on the anatomy and age of the patient.
3. The implant package of claim 1 or 2, wherein the flexibility of the flexible connection between the protective housing and the protective casing is such as to allow changes in head shape as the patient grows.
4. The implant package of any preceding claim, wherein the flexible connection is made from a material having memory so that the coupling retains its shape after installation into the mastoid cavity.
5. The implant package of any preceding claim, wherein the implant package is electrically coupled to the electrode array.
6. The implant package of any preceding claim, wherein the implant package is electrically coupled to the receiving and/or transmitting coil.
7. The implant package of claim 6, wherein the flexible connection includes one or more flexible arms containing leads which electrically connect the implant electronics to the receiving and/or transmitting coil.
8. The implant package of any preceding claim, wherein the implant package is a receiver-stimulator package for a cochlear implant.

1/1

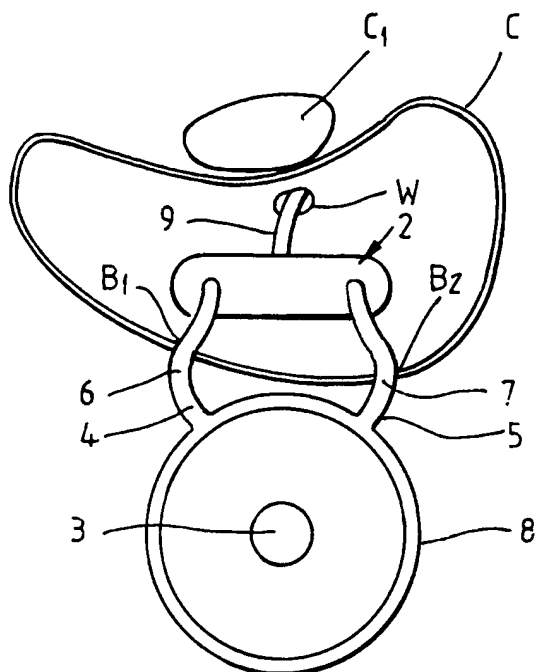


FIG. 1.

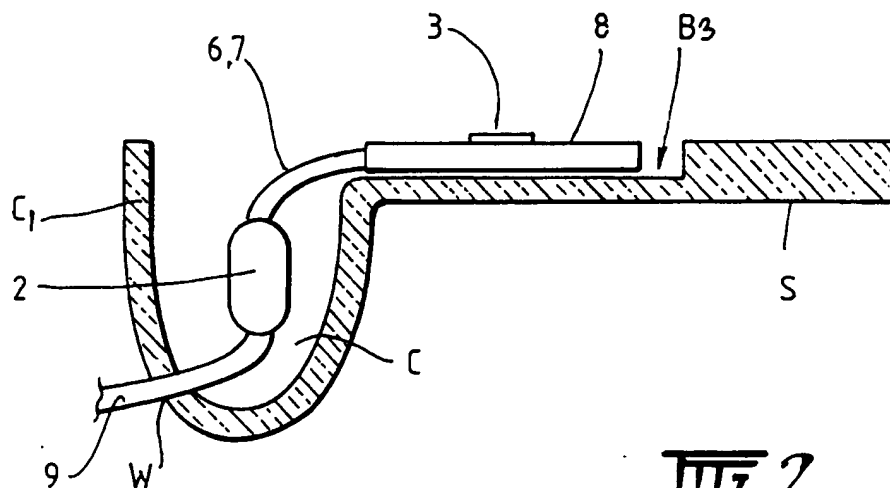


FIG. 2.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU00/00936

A. CLASSIFICATION OF SUBJECT MATTER		
Int. Cl. ⁷ : A61F 11/04, 2/18		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) A61F 2/IC, 11/IC		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC AS ABOVE		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT JAPIO		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99/06108 A (ALFRED E MANN FOUNDATION FOR SCIENTIFIC RESEARCH et al) 11 February 1999 See page 3 lines 1-9, page 5 line 28-page 6 line 9 and page 20 lines 1-16.	1-3, 5-8
A	US 5814095 A (MULLER et al) 29 September 1998 See figures 1-4.	
A	US 5558618 A (MANIGLIA) 24 September 1996 See entire document.	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 28 September 2000		Date of mailing of the international search report 10 OCT 2000
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929		Authorized officer JOHN HO Telephone No : (02) 6283 2329

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00936

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97/05673 A (COCHLEAR PTY LTD) 13 February 1997 See entire document.	
A	WO 83/00999 A (HOCHMAIR) 31 March 1983 See entire document.	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU00/00936

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
WO	9906108	AU	86804/98	EP	999874		
US	5814095	—	DE	19638158	EP	831673	DE
		19638159	EP	831674			
US	5558618	US	5906635				
WO	9705673	AU	31054/95				
WO	8300999	AU	88333/82	AU	89540/82	BE	894422
		BR	8207864	CA	1194552	DK	1993/83
		EP	76069	US	4419995		
END OF ANNEX							

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/97906 A2


- (51) International Patent Classification⁷: **A61N 1/36** (74) Agent: **GOLD, Bryant, R.**; Advanced Bionics Corporation, 12740 San Fernando Road, Sylmar, CA 91342 (US).
- (21) International Application Number: **PCT/US01/19281** (81) Designated States (*national*): AU, CA, JP.
- (22) International Filing Date: 15 June 2001 (15.06.2001) (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/212,871 20 June 2000 (20.06.2000) US
- (71) Applicant: **ADVANCED BIONICS CORPORATION**
[US/US]; 12740 San Fernando Road, Sylmar, CA 91342 (US).
- (72) Inventor: **WHITEHURST, Todd, K.**; 4454 Vista del Monte Avenue, #9, Sherman Oaks, CA 91403 (US).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR TREATMENT OF MOOD AND/OR ANXIETY DISORDERS BY ELECTRICAL BRAIN STIMULATION AND/OR DRUG INFUSION

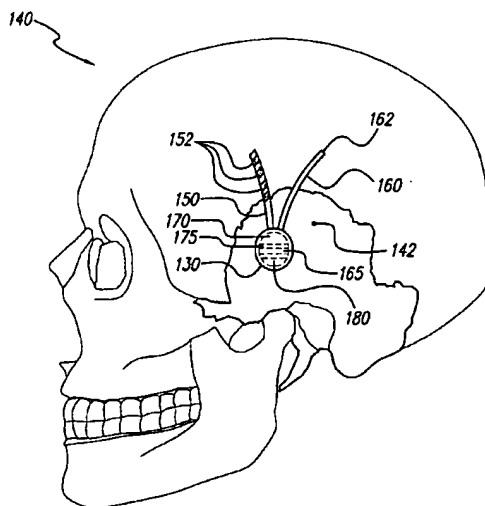

(57) Abstract: Apparatus for introducing one or more stimulating drugs and/or applying electrical stimulation to the brain to treat mood and/or anxiety disorders uses an implantable system control unit (SCU) (130), specifically an implantable signal/pulse generator (IPG) or microstimulator with two or more electrodes (152) in the case of electrical stimulation, and an implantable pump (165) with one or more catheters (160) in the case of drug infusion. In cases requiring both electrical and drug stimulation, one or more SCUs are used. Alternatively and preferably, when needed, an SCU provides both electrical stimulation and one or more stimulating drugs. In a preferred embodiment, the system is capable of open- and closed-loop operation. In closed-loop operation, at least one SCU includes a sensor, and the sensed condition is used to adjust stimulation parameters.

WO 01/97906 A2

- 1 -

**Apparatus for Treatment of Mood and/or Anxiety Disorders
by Electrical Brain Stimulation and/or Drug Infusion**

Background of the Invention

5 The present invention generally relates to implantable drug delivery and electrical stimulation systems and methods, and more particularly relates to utilizing one or more implantable devices to deliver electrical stimulation and/or one or more stimulating drugs as a treatment for mood and/or anxiety disorders.

 Recent estimates indicate that more than 19 million Americans over
10 the age of 18 years experience a depressive illness each year. The American Psychiatric Association recognizes several types of clinical depression, including Mild Depression (Dysthymia), Major Depression, and Bipolar Disorder (Manic-Depression). Major Depression is defined by a constellation of chronic symptoms that include sleep problems, appetite problems, anhedonia or lack of energy,
15 feelings of worthlessness or hopelessness, difficulty concentrating, and suicidal thoughts. Approximately 9.2 million Americans suffer from Major Depression, and approximately 15 percent of all people who suffer from Major Depression take their own lives. Bipolar Disorder involves major depressive episodes alternating with high-energy periods of rash behavior, poor judgment, and grand delusions. An estimated
20 1 percent of the American population experiences Bipolar Disorder annually.

 Significant advances in the treatment of depression have been made in the past decade. Since the introduction of Selective Serotonin Reuptake Inhibitors (SSRIs), e.g., Prozac[®] antidepressant, many patients have been effectively treated with anti-depressant medication. New medications to treat depression are
25 introduced almost every year, and research in this area is ongoing. However, an estimated 10 to 30 percent of depressed patients taking an antidepressant are partially or totally resistant to the treatment. Those who suffer from treatment-resistant depression have almost no alternatives.

 Electroconvulsive Therapy (ECT) is an extreme measure that is used
30 today to treat such patients. In ECT, a low-frequency electrical signal is sent through the brain to induce a 30- to 60-second general seizure. The side effects include memory loss and other types of cognitive dysfunction.

 Repetitive Transcranial Magnetic Stimulation (rTMS) is currently being explored as another therapy for depression. Kirkcaldie et al. (1997) reported a
35 greater than 50 percent response rate when applying rTMS to the left dorsolateral prefrontal cortex of 17 depressed patients. In addition, a company headquartered in

- 2 -

Houston, Texas is currently exploring the application of vagus nerve stimulation to treatment-resistant depression; Rush, et al. (1999) report a success rate of 40-50 percent in a recent study of 30 patients.

Deep Brain Stimulation (DBS) has been applied to the treatment of
5 central pain syndromes and movement disorders, and it is currently being explored as a therapy for epilepsy. For instance, U.S. Patent No. 6,016,449 to Fischell, et al. discloses a system for the electrical stimulation of areas in the brain for the treatment of certain neurological diseases such as epilepsy, migraine headaches and Parkinson's disease. However, Fischell et al. do not teach or suggest the use of
10 such a system for the treatment of mood disorders, such as depression.

As was recently reported by Bejjani, et al. (1999), a patient responded to DBS of an area near the thalamus during the therapeutic placement of a stimulator for tremor, by lapsing into a sudden and marked depressive episode. The depression ceased within a couple of minutes after stimulation was halted, and the
15 patient demonstrated a rebound ebullience. This phenomenon was repeated in the same patient several weeks later for purposes of verification.

New functional imaging techniques have led to the identification of several sites in the brain that demonstrate abnormal characteristics (e.g., hypoperfusion) in depression. Several regions of the brain have been identified as
20 having decreased blood flow or metabolism in depressed patients compared to controls. In an important 1997 study, Drevets et al. reported that the subgenual prefrontal cortex (i.e., the anterior cingulate gyrus ventral to the corpus callosum) demonstrated decreased blood flow or metabolism in patients with Major Depression and with Bipolar Disorder compared with psychiatrically normal controls.

25 Similarly, Ebmeier et al. (1997), in a review of several studies, reported that the anterior cingulate gyrus demonstrates decreased blood flow or metabolic activity in depressed patients. In a 1999 review, Davidson et al. cite several reports that indicate that the left anterior cingulate gyrus demonstrates decreased activity in depression and furthermore demonstrates increased activity in
30 depressed patients who respond to antidepressant medication.

Galynker et al. (1998) reported that decreased blood flow in the left dorsolateral prefrontal cortex correlated with severity of negative symptoms in depressed patients. (The left dorsolateral prefrontal cortex is the primary target of rTMS in the treatment of depression.) Drevets, in an extensive 1998 review,
35 generalizes these results to suggest that the dorsal prefrontal cortex demonstrates

- 3 -

decreased activity in depression while the ventral prefrontal cortex demonstrates increased activity.

5 Bench et al. (1992) reported decreased blood flow in the left anterior cingulate gyrus and the left dorsolateral prefrontal cortex in depressed patients as compared with controls, and further reported increased blood flow in the cerebellar vermis in depressed patients with depression-related cognitive impairment.

10 As stated above, Drevets reported that the ventral prefrontal cortex demonstrates *increased* activity in depressed patients, and further reported evidence that blood flow and metabolism are abnormally increased in the medial thalamus in patients with Major Depression and Bipolar Disorder as compared with controls. As also stated above, Bench reported abnormally increased blood flow in the cerebellar vermis in depressed patients with depression-related cognitive impairment. Abercrombie et al. (1998) reported that the metabolic rate in the right amygdala predicts negative affect in depressed patients (although no absolute difference was
15 found between depressed and control subjects).

 Recent studies of neurotransmitter receptors in the brains of patients with depression also suggest possible sites of the brain that are abnormal in depression. Stockmeier et al. (1997) reported an increased number of serotonin receptors in the dorsal raphe nucleus of suicide victims with major depression as
20 compared with psychiatrically normal controls. Similarly, Yavari et al. (1993) reported decreased activity in the dorsal raphe nucleus in a rat model of endogenous depression. Klimek et al. (1997) reported reduced levels of norepinephrine transporters in the locus coeruleus in major depression. These findings corroborate existing anatomical evidence regarding the functions of these areas.

25 In 1998, Saxena et al. performed a study of the pathophysiology of obsessive-compulsive disorder. They found that at least a subgroup of patients with obsessive-compulsive disorder may have abnormal basal ganglia development. They observed that obsessive-compulsive disorder symptoms are associated with increased activity in the orbitofrontal cortex, caudate nucleus, thalamus, and anterior
30 cingulate gyrus.

 The dorsal and median raphe nuclei, which course within the medial forebrain bundle, the dorsal longitudinal fasciculus, and the medial longitudinal fasciculus, have long been known to have major serotonergic projections to the limbic system. Medications that block serotonin reuptake (thus increasing its level)

- 4 -

are effective therapy for depression, panic disorder, obsessive-compulsive disorder, and other mood and anxiety disorders.

The locus coeruleus, which lies near the floor of the fourth ventricle, has major noradrenergic projections to virtually the entire central nervous system, including the cerebral cortex, the limbic system, and the hypothalamus. Medications that dually block serotonin and norepinephrine reuptake (and thus increase their levels) are effective therapy for depression, panic disorder, obsessive-compulsive disorder, and other mood and anxiety disorders.

Low-frequency electrical stimulation (i.e., less than 50-100 Hz), has been demonstrated to excite neural tissue, leading to increased neural activity. Similarly, excitatory neurotransmitters, agonists thereof, and agents that act to increase levels of an excitatory neurotransmitter(s) have been demonstrated to excite neural tissue, leading to increased neural activity. Inhibitory neurotransmitters have been demonstrated to inhibit neural tissue, leading to decreased neural activity; however, antagonists of inhibitory neurotransmitters and agents that act to decrease levels of an inhibitory neurotransmitter(s) have been demonstrated to excite neural tissue, leading to increased neural activity.

High-frequency electrical stimulation (i.e., more than about 50-100 Hz) is believed to have an inhibitory effect on neural tissue, leading to decreased neural activity. Similarly, inhibitory neurotransmitters, agonists thereof, and agents that act to increase levels of an inhibitory neurotransmitter(s) have an inhibitory effect on neural tissue, leading to decreased neural activity. Excitatory neurotransmitters have been demonstrated to excite neural tissue, leading to increased neural activity; however, antagonists of excitatory neurotransmitters and agents that act to decrease levels of an excitatory neurotransmitter(s) inhibit neural tissue, leading to decreased neural activity.

Various electrical stimulation and/or drug infusion devices have been proposed for treating neurological disorders. Some devices stimulate through the skin, such as electrodes placed on the scalp. Other devices require significant surgical procedures for placement of electrodes, catheters, leads, and/or processing units. These devices may also require an external apparatus that needs to be strapped or otherwise affixed to the skin.

While some patents exist that teach drug infusion and/or electrical stimulation for treatment of neurological disorders (see, e.g., U.S. Patent Numbers 5,092,835; 5,299,569; 5,540,734; 5,975,085; 6,128,537; and 6,167,311), the

- 5 -

inventors know of no device that targets the areas of the brain previously discussed and provides chronic stimulation via a device that is implanted completely within the head of the patient. For instance, in U.S. Patent Number 6,128,537 (the '537 patent), the infusion pump (reference number 10), the electrical signal generator (reference number 16), or both devices are implanted in the body of the patient, but not in the head of the patient. In the figures depicting the implanted devices (figures 1, 4, 5, 6, and 7), it is readily seen that a catheter (number 22 in figures 1, 4, 6, and 7) or a cable (numbered 42' in figure 5) is tunneled through, at the very least, the neck of the patient in order to allow a drug or electrical stimulation to reach a desired target in the brain. Further, note column 6, lines 8-10 of the '537 patent: "Signal generator 16 is implanted in a human body, preferably in a subcutaneous pocket located over the chest cavity or the abdomen." There is no recognition in the '537 patent that tunneling catheters and/or cables from the chest to the head, or from the abdomen to the head, is a problem to be overcome.

On the other hand, U.S. Patent Number 6,167,311 (the '311 patent) seems to recognize this problem, but offers no solution. Additionally, the '311 patent acknowledges that there is no presently available solution, and that therefore, the signal generator "must be disposed at a remote site in the patient's body." Note column 7, lines 57-62 of the '311 patent: "As is readily obvious to anyone who has witnessed the unnecessary surgical procedure associated with the remote localization of the power source, it is desirable the burr cap structure itself comprise the signal source. However, as that option is not presently available the signal source generator must be disposed at a remote site in the patient's body."

As implied by the '311 patent, there are significant problems associated with existing systems and methods (such as in the '537 and '311 patents) for implanting a signal generator, infusion pump, or other device at a remote site in the patient's body, which result in tunneling of a catheter(s) or cable(s) through the neck and other areas of the body. For instance, tunneling a long cable through the neck can easily lead to lead damage and breakage. In addition, the long cable routed through the neck to the brain provides an extended track for infection directly into the brain. Also, surgical tunneling for the cable and placement of the signal generator require general anesthesia due to the large, broad area involved. General anesthesia has a rather high risk of mortality and morbidity vis-à-vis local anesthetic. In addition, the tunneling tool used for the long cable passes dangerously close to

the common carotid artery and the jugular vein in the neck, with attendant risks of bleeding and stroke.

In addition to the above and other problems not acknowledged or addressed by the prior art, is the existence of areas in the brain of patients with mood and/or anxiety disorders with decreased activity compared with control subjects. For instance, the '537 patent teaches treating anxiety by decreasing neuronal activity in certain areas of the brain that exhibit increased activity.

Brief Summary of the Invention

The invention disclosed and claimed herein provides systems and methods for introducing one or more stimulating drugs and/or applying electrical stimulation to one or more areas of the brain via a "skull-mounted" device. The stimulation may be used to treat mood and/or anxiety disorders. The findings described earlier suggest that electrical stimulation of specific sites in the brain may lead to profound changes in mood. For instance, the functional imaging and clinical studies described above suggest likely targets for Deep Brain Stimulation (DBS) as a therapy for depression.

Patients with mood and/or anxiety disorders will likely respond to therapeutic excitatory stimulation applied to those areas of the brain that exhibit chronic *decreased* activity relative to psychiatrically normal control subjects. Such excitatory stimulation is likely to be produced by low-frequency electrical stimulation, an excitatory neurotransmitter agonist, an inhibitory neurotransmitter antagonist, and/or a medication that increases levels of an excitatory neurotransmitter, such as Prozac® antidepressant (i.e., fluoxetine hydrochloride).

Patients with mood and/or anxiety disorders will likely respond to therapeutic inhibitory stimulation applied to those areas of the brain that exhibit chronic *increased* activity relative to psychiatrically normal control subjects. Such inhibitory stimulation is likely to be produced by high-frequency electrical stimulation, an inhibitory neurotransmitter agonist, an excitatory neurotransmitter antagonist, and/or a medication that increases the level of an inhibitory neurotransmitter.

The treatment provided by the invention is carried out by at least a system control unit (SCU). In one preferred form, and SCU comprises an implantable pulse generator (IPG) and implantable electrode(s) in the case of electrical stimulation only and an implantable pump and catheter(s) in the case of drug infusion only. However, an SCU preferably provides both electrical stimulation

- 7 -

and one or more stimulating drugs when necessary and desired. In this embodiment, the SCU is preferably implanted in a surgically-created shallow depression in the temporal bone, with one or more electrode leads and/or catheters attached to the SCU running subcutaneously to an opening in the skull where they pass into or onto the brain parenchyma and surrounding tissue. In another preferred form of an SCU, a miniature implantable neurostimulator, such as a Bionic Neuron (also referred to as a BION™ microstimulator), is implanted. Preferred systems also include one or more sensors for sensing symptoms or other conditions that may indicate a need for treatment.

5 The SCU preferably includes a programmable memory for storing data and/or control stimulation parameters. This allows stimulation and control parameters to be adjusted to levels that are safe and efficacious with minimal discomfort. Electrical and drug stimulation may be controlled independently; alternatively, electrical and drug stimulation may be coupled, e.g., electrical stimulation may be programmed to occur only during drug infusion.

10 A preferred form of the invention uses one or more stimulating drugs and/or electrical stimulation to treat depression. According to one embodiment of the invention, the stimulation increases excitement of one or more of those areas of the brain that exhibit chronic decreased activity in patients relative to psychiatrically normal control subjects, thereby treating or preventing depression. Such excitatory stimulation is likely to be produced by low-frequency electrical stimulation, an excitatory neurotransmitter agonist(s) (e.g., norepinephrine), an inhibitory neurotransmitter antagonist(s), and/or a medication that increases the level of an excitatory neurotransmitter (e.g., Prozac® antidepressant). Additional uses of the present invention include the application to panic disorder, obsessive-compulsive disorder, and other mood and/or anxiety disorders.

20 According to another embodiment of the invention, the stimulation decreases excitement of one or more of those areas of the brain that exhibit chronic increased activity in patients relative to psychiatrically normal control subjects, thereby treating or preventing depression. Such inhibitory stimulation is likely to be produced by high-frequency electrical stimulation, an inhibitory neurotransmitter agonist(s) (e.g., Gamma-Aminobutyric Acid, or GABA), an excitatory neurotransmitter antagonist(s), and/or a medication that increases the level of an inhibitory neurotransmitter. Again, additional uses include the application to panic disorder, obsessive-compulsive disorder, and other mood and/or anxiety disorders.

- 8 -

According to a preferred embodiment of the invention, the electrodes used for electrical stimulation are arranged as an array on a very thin implantable lead. The SCU is programmed to produce either monopolar electrical stimulation, e.g., using the SCU case as an indifferent electrode, or to produce bipolar electrical stimulation, e.g., using one of the electrodes of an electrode array as an indifferent electrode. The SCU includes a means of stimulating a nerve or infusing a stimulating drug(s) either intermittently or continuously. Specific stimulation parameters may provide therapeutic advantages for, e.g., various forms of mood and/or anxiety disorders.

10 The SCU used with the present invention preferably possesses one or more of the following properties:

- at least two electrodes for applying stimulating current to surrounding tissue and/or a pump and at least one catheter for delivering a drug or drugs to surrounding tissue;
- 15 electronic and/or mechanical components encapsulated in a hermetic package made from biocompatible material(s);
- an electrical coil inside the package that receives power and/or data by inductive or radio-frequency (RF) coupling to a transmitting coil placed outside the body, avoiding the need for electrical leads to connect devices to a central implanted or external controller;
- 20 means for receiving and/or transmitting signals via telemetry;
- means for receiving and/or storing electrical power within the SCU; and
- a form factor making the SCU implantable in a depression or opening in the skull.
- 25

The power source of the SCU is preferably realized using one or more of the following options:

- (1) an external power source coupled to the SCU via a radio-frequency (RF) link;
- 30 (2) a self-contained power source made using any means of generation or storage of energy, e.g., a primary battery, a replenishable or rechargeable battery, a capacitor, a supercapacitor; and/or

- 9 -

(3) if the self-contained power source is replenishable or rechargeable, a means of replenishing or recharging the power source, e.g., an RF link, an optical link, or other energy-coupling link.

According to one embodiment of the invention, an SCU operates independently. According to another embodiment of the invention, an SCU operates in a coordinated manner with other implanted SCUs, other implanted devices, or with devices external to the patient's body.

According to yet another embodiment of the invention, an SCU incorporates means of sensing the disorder or symptoms thereof, or other measures of the state of the patient. Sensed information is preferably used to control the electrical and/or drug stimulation parameters of the SCU in a closed loop manner. According to one embodiment of the invention, the sensing and stimulating means are incorporated into a single SCU. According to another embodiment of the invention, the sensing means communicates sensed information to at least one SCU with stimulating means.

Thus, the present invention provides systems and methods for the treatment of mood and/or anxiety disorders that utilizes at least one compact, relatively inexpensive SCU. The implant site is preferably chosen to result in a relatively simple procedure, with the associated advantages in terms of reduced surgical time, expense, possible error, and opportunity for infection. Other advantages of the present invention include, *inter alia*, the system's monitoring and programming capabilities, the power source, storage, and transfer mechanisms, the activation of the device by the patient or clinician, the system's open loop capabilities and closed loop capabilities coupled with sensing a need for and/or response to treatment, and coordinated use of one or more SCUs.

Brief Description of the Drawings

The above and other aspects, features, and advantages of the present invention will be more apparent from the following more particular description thereof, presented in conjunction with the following drawings wherein:

- FIG. 1 depicts the lateral surface of the brain;
- FIG. 2 depicts the medial surface of the brain;
- FIG. 3A depicts the dorsal surface of the brain stem;
- FIG. 3B is a section view through the brain stem depicted in FIG. 3A;
- FIG. 4A depicts the medial surface of the head;

- 10 -

FIGS. 4B - 4D depict coronal section views of the brain of FIG. 4A;

FIG. 5 illustrates a lateral view of the skull;

FIG. 6 illustrates internal and external components of an embodiment of the invention; and

5 FIG. 7 illustrates external components of an embodiment of the invention.

Corresponding reference characters indicate corresponding components throughout the several views of the drawings.

10 Detailed Description of the Invention

The following description is of the best mode presently contemplated for carrying out the invention. This description is not to be taken in a limiting sense, but is made merely for the purpose of describing the general principles of the invention. The scope of the invention should be determined with reference to the
15 claims.

As described above, decreased blood flow has been noted in the left dorsolateral prefrontal cortex (or medial frontal gyrus) of depressed patients, and was correlated with the severity of negative symptoms. FIG. 1 depicts the lateral surface of the brain, and shows the location of the dorsolateral prefrontal cortex 100.

20 Similarly, the anterior cingulate gyrus has demonstrated decreased blood flow or metabolic activity in patients with depression, while increased activity has been noted in the anterior cingulate gyrus of patients responding to antidepressant medication. FIG. 2 depicts the medial surface of the brain, and indicates the location of the anterior cingulate gyrus 102.

25 As noted above, levels of neurotransmitters and their receptors in the brains of patients with depression also indicate sites in the brain that are abnormal in depression. For example, an increase in serotonin receptors in the dorsal raphe nucleus has been implicated in suicide victims with major depression. An unusually large population of receptors may indicate that serotonin levels are unusually low.

30 Furthermore, other indications suggest that decreased activity in the dorsal raphe nucleus may be related to depression. The location of the dorsal raphe nucleus 110 is shown in FIG. 3B. In addition, reduced levels of the neurotransmitter norepinephrine are found in the locus coeruleus of some patients with major depression. The location of the locus coeruleus 112 is shown in FIG. 4B.

- 11 -

As stated earlier, the median and dorsal raphe nuclei 110 have major serotonergic projections to the limbic system, and the locus coeruleus 112 has major noradrenergic projections to virtually the entire central nervous system, including the cerebral cortex, the hypothalamus, and the limbic system. In general, portions of the limbic system, which system is credited with roles in memory, emotion, and olfaction, often demonstrate decreased activity in depressed patients. For instance, areas that release serotonin, and areas responsible for norepinephrine produce less of these neurotransmitters in many depressed patients (for which the body may attempt to compensate with higher levels of receptors). Thus, via mechanisms described in more detail below, the present invention provides electrical stimulation, and/or excitatory neurotransmitter agonist(s), and/or inhibitory neurotransmitter antagonist(s), and/or medication that increases the level of an excitatory neurotransmitter to these areas or increases the level of neural activity in these areas.

In other cases of depression, *increased* activity is found in various locations within the brain. For instance, the ventral prefrontal cortex 120 (FIG. 1) demonstrates increased activity in some patients with depression. In addition, blood flow and metabolism are abnormally increased in the medial thalamus 122 (FIG. 4B) of some patients with Major Depression and Bipolar Disorder as compared with controls. Increased blood flow has also been seen in the cerebellar vermis 124 (FIG. 4C) of patients with depression-related cognitive impairment, while the metabolic rate in the right amygdala 126 (FIG. 4D) seems to predict negative affects in some depressed patients. Also, patients with obsessive-compulsive disorder have exhibited increased activity in the orbitofrontal cortex 128 (FIG. 1), anterior cingulate gyrus 102 (FIG. 2), thalamus 123 (FIG. 4B), and caudate nucleus 129 (FIG. 4D).

The present invention provides electrical and/or drug stimulation to one or more of the above mentioned areas as a treatment for mood and/or anxiety disorders. Herein, stimulating drugs comprise medications, anesthetic agents, synthetic or natural hormones, neurotransmitters, cytokines and other intracellular and intercellular chemical signals and messengers, and the like. In addition, certain neurotransmitters, hormones, and other drugs are excitatory for some tissues, yet are inhibitory to other tissues. Therefore, where, herein, a drug is referred to as an "excitatory" drug, this means that the drug is acting in an excitatory manner, although it may act in an inhibitory manner in other circumstances and/or locations. Similarly,

- 12 -

where an "inhibitory" drug is mentioned, this drug is acting in an inhibitory manner, although in other circumstances and/or locations, it may be an "excitatory" drug. In addition, stimulation of an area herein includes stimulation of cell bodies and axons in the area.

5 In one preferred alternative, an implantable signal generator and electrode(s) and/or an implantable pump and catheter(s) are used to deliver electrical stimulation and/or one or more stimulating drugs to specific areas in the brain. One or more electrodes are surgically implanted in the brain to provide electrical stimulation, and/or one or more catheters are surgically implanted in the
10 brain to infuse the stimulating drug(s).

 As depicted in FIG. 5, system control unit (SCU) 130 is preferably (but not necessarily) implanted beneath the scalp, more preferably in a surgically-created shallow depression or opening in the skull 140, and most preferably in temporal bone 142. SCU 130 preferably conforms to the profile of surrounding tissue(s)
15 and/or bone(s), and is small and compact. This is preferable so that no unnecessary pressure is applied to the skin or scalp, as this may result in skin erosion or infection. SCU 130 preferably has a diameter of no greater than 75 mm, more preferably no greater than 65 mm, and most preferably about 35-55 mm. SCU thickness (e.g., depth into the skull) of approximately 10-12 mm is preferred, while a thickness of
20 about 8-10 mm or less is more preferred.

 One or more electrode leads 150 and/or catheters 160 attached to SCU 130 run subcutaneously, preferably in a surgically-created shallow groove(s) in the skull, to an opening(s) in the skull, and pass through the opening(s) into or onto the brain parenchyma and surrounding tissue. Recessed placement of the SCU and
25 the lead(s) and/or catheter(s) has the advantages of decreased likelihood of erosion of the overlying skin, and of minimal cosmetic impact.

 In the case of treatment with electrical stimulation, electrode(s) 152 are carried on lead 150 having a proximal end coupled to SCU 130. The lead contains wires electrically connecting electrodes 152 to SCU 130. SCU 130 contains
30 electrical components 170 that produce electrical stimulation pulses that travel through the wires of lead 150 and are delivered to electrodes 152, and thus to the tissue surrounding electrodes 152. To protect the electrical components inside SCU 130, the case of the SCU is preferably hermetically sealed. For additional protection against, e.g. impact, the case is preferably made of metal (e.g. titanium)

- 13 -

or ceramic, which materials are also, advantageously, biocompatible. In addition, SCU 130 is preferably Magnetic Resonance Imaging (MRI) compatible.

In one alternative, the electrical stimulation of the present invention may be provided as described in International Patent Application Serial Number
 5 PCT/US01/04417 (the '417 application), filed 2/12/2001, which is directed to a "Deep Brain Stimulation System for the Treatment of Parkinson's Disease or Other Disorders".

In yet another alternative, the electrical stimulation is provided by one or more implantable microstimulators, preferably of the type referred to as BION™
 10 devices. The following documents describe various features and details associated with the manufacture, operation and use of BION implantable microstimulators:

	Application/Patent/ Publication No.	Filing/Publication Date	Title
	U.S. Patent 5,193,539	Issued Mar 16, 1993	Implantable Microstimulator
15	U.S. Patent 5,193,540	Issued Mar 16, 1993	Structure and Method of Manufacture of an Implantable Microstimulator
	U.S. Patent 5,312,439	Issued May 17, 1994	Implantable Device Having an Electrolytic Storage Electrode
	U.S. Patent 5,324,316	Issued June 28, 1994	Implantable Microstimulator
	U.S. Patent 5,405,367	Issued April 11, 1995	Structure and Method of Manufacture of an Implantable Microstimulator
20	PCT Publication WO 98/37926	Published September 3, 1998	Battery-Powered Patient Implantable Device
	PCT Publication WO 98/43700	Published October 8, 1998	System of Implantable Devices For Monitoring and/or Affecting Body Parameters
	PCT Publication WO 98/43701	Published October 8, 1998	System of Implantable Devices For Monitoring and/or Affecting Body Parameters
25	U.S. Patent 6,051,017 (App. No. 09/077,662)	Issued April 18, 2000	Improved Implantable Microstimulator and Systems Employing Same
		Published September, 1997	Micromodular Implants to Provide Electrical Stimulation of Paralyzed Muscles and Limbs, by Cameron, et al., published in IEEE Transactions on Biomedical Engineering, Vol. 44, No. 9, pages 781-790.

The microstimulator, when used, is preferably implanted with a
 30 surgical insertion tool specially designed for the purpose, or is injected (e.g., via a hypodermic needle). Alternatively, the device may be implanted via conventional surgical methods, or may be inserted using other endoscopic or laparoscopic techniques. A more complicated surgical procedure may be required for fixing the microstimulator in place.

- 14 -

In one preferred embodiment, the microstimulator comprises two, leadless electrodes. However, either or both electrodes may alternatively be located at the ends of short, flexible leads. The use of such leads may permit electrical stimulation to be directed more locally to targeted tissue(s) a short distance from the surgical fixation of the bulk of the implantable stimulator, allowing most elements of the microstimulator to be located in a more surgically convenient site. This minimizes the distance traversed and the surgical planes crossed by the device and any lead(s). In a preferred embodiment, the leads are no longer than about 50 mm.

As mentioned earlier, stimulation is provided in accordance with the teachings of the present invention by electrical stimulation and/or one or more stimulating drugs. The invention includes one or more system control units (SCU). In the case of electrical stimulation only, preferred SCUs include a microstimulator(s) and/or an implantable pulse/signal generator (IPG). In the case of drug infusion only, a preferred SCU comprises an implantable pump. In cases requiring both electrical stimulation and drug infusion, one or more SCUs are used. Alternatively and preferably, when needed, an SCU provides both electrical stimulation and one or more stimulating drugs.

In the case of treatment alternatively or additionally constituting drug infusion, catheter(s) 160 are coupled at a proximal end to SCU 130, which contains at least one pump 165 for storing and dispensing one or more drug(s) through the catheter(s) 160. Preferably at a distal end, catheter 160 has a discharge portion 162 for infusing dosages of the one or more drugs into a predetermined site in the brain tissue.

SCU 130 (which herein refers to IPGs, implantable pumps, IPG/pump combinations, microstimulators, and/or other alternative devices described herein) preferably contains electronic circuitry 170 for receiving data and/or power from outside the body by inductive, radio frequency (RF), or other electromagnetic coupling. In a preferred embodiment, electronic circuitry 170 includes an inductive coil for receiving and transmitting RF data and/or power, an integrated circuit (IC) chip for decoding and storing stimulation parameters and generating stimulation pulses (either intermittent or continuous), and additional discrete electronic components required to complete the electronic circuit functions, e.g. capacitor(s), resistor(s), coil(s), and the like.

SCU 130 also advantageously includes a programmable memory 175 for storing a set(s) of data, stimulation, and control parameters. This feature allows

- 15 -

electrical and/or drug stimulation to be adjusted to settings that are safe and efficacious with minimal discomfort for each individual. Specific parameters may provide therapeutic advantages for various levels and types of mood and/or anxiety disorders. For instance, some patients may respond favorably to intermittent
5 stimulation, while others may require continuous treatment for relief. Electrical and drug stimulation parameters are preferably controlled independently. However, in some instances, they are advantageously coupled, e.g., electrical stimulation may be programmed to occur only during drug infusion.

In addition, parameters may be chosen to target specific neural
10 populations and to exclude others, or to increase neural activity in specific neural populations and to decrease neural activity in others. For example, relatively low frequency neurostimulation (i.e., less than about 50-100 Hz) typically has an excitatory effect on surrounding neural tissue, leading to increased neural activity, whereas relatively high frequency neurostimulation (i.e., greater than about 50-100
15 Hz) typically has an inhibitory effect, leading to decreased neural activity. Similarly, excitatory neurotransmitter agonists (e.g., norepinephrine, epinephrine, glutamate, acetylcholine, serotonin, dopamine), agonists thereof, and agents that act to increase levels of an excitatory neurotransmitter(s) (e.g., edrophonium, Mestionon) generally have an excitatory effect on neural tissue, while inhibitory
20 neurotransmitters (e.g., dopamine, glycine, and gamma-aminobutyric acid, a.k.a. GABA), agonists thereof, and agents that act to increase levels of an inhibitory neurotransmitter(s) generally have an inhibitory effect. (Dopamine acts as an excitatory neurotransmitter in some locations and circumstances, and as an inhibitory neurotransmitter in other locations and circumstances.) However,
25 antagonists of inhibitory neurotransmitters (e.g., bicuculline) and agents that act to decrease levels of an inhibitory neurotransmitter(s) have been demonstrated to excite neural tissue, leading to increased neural activity. Similarly, excitatory neurotransmitter antagonists (e.g. prazosin, and metoprolol) and agents that decrease levels of excitatory neurotransmitters may inhibit neural activity.

30 The preferred SCU 130 also includes a power source and/or power storage device 180. Possible power options for a stimulation device of the present invention, described in more detail below, include but are not limited to an external power source coupled to the stimulation device, e.g., via an RF link, a self-contained power source utilizing any means of generation or storage of energy (e.g., a primary

- 16 -

battery, a rechargeable battery such as a lithium ion battery, an electrolytic capacitor, or a super- or ultra-capacitor), and if the self-contained power source is replenishable or rechargeable, means of replenishing or recharging the power source (e.g., an RF link).

5 In one preferred embodiment shown in FIG. 6, SCU 130 includes a rechargeable battery as a power source/storage device 180. The battery is recharged, as required, from an external battery charging system (EBCS) 182, typically through an inductive link 184. In this embodiment, and as explained more fully in the earlier referenced '417 PCT application, SCU 130 includes a processor
10 and other electronic circuitry 170 that allow it to generate stimulation pulses that are applied to the patient through electrodes 152 and/or catheter(s) 160 in accordance with a program and stimulation parameters stored in programmable memory 175. Stimulation pulses of drugs include various types and rates of infusion, such as intermittent infusion, infusion at a constant rate, and bolus infusion.

15 According to one preferred embodiment of the invention, such as described in the previously referenced '417 application and as depicted in FIG. 6, at least one lead 150 is attached to SCU 130, via a suitable connector 154. Each lead includes at least two electrodes 152, and may include as many as sixteen or more electrodes 152. Additional leads 150' and/or catheter(s) 160' may be attached to
20 SCU 130. Hence, FIG. 6 shows (in phantom lines) a second catheter 160', and a second lead 150', having electrodes 152' thereon, also attached to SCU 130.

 Lead(s) 150 are preferably less than 5 mm in diameter, and more preferably less than 1.5 mm in diameter. Electrodes 152, 152' are preferably arranged as an array, more preferably are at least two collinear electrodes, and more
25 preferably at least 4 collinear electrodes. SCU 130 is preferably programmable to produce either monopolar electrical stimulation, e.g., using the SCU case as an indifferent electrode, or bipolar electrical stimulation, e.g., using one of the electrodes of the electrode array as an indifferent electrode. A preferred SCU 130 has at least four channels and drives up to sixteen electrodes or more.

30 According to one embodiment of the invention, an SCU operates independently. According to another embodiment of the invention, an SCU operates in a coordinated manner with other SCU(s), other implanted device(s), or other device(s) external to the patient's body. For instance, an SCU may control or operate under the control of another implanted SCU(s), other implanted device(s), or

- 17 -

other device(s) external to the patient's body. An SCU may communicate with other implanted SCUs, other implanted devices, and/or devices external to a patient's body via, e.g., an RF link, an ultrasonic link, or an optical link. Specifically, an SCU may communicate with an external remote control (e.g., patient and/or physician
5 programmer) that is capable of sending commands and/or data to an SCU and that is preferably capable of receiving commands and/or data from an SCU.

For example, SCU 130 of the present invention may be activated and deactivated, programmed and tested through a hand held programmer (HHP) 190 (which may also be referred to as a patient programmer and is preferably, but not
10 necessarily, hand held), a clinician programming system (CPS) 192 (which may also be hand held), or a manufacturing and diagnostic system (MDS) 194 (which may also be hand held). HHP 190 may be coupled to SCU 130 via an RF link 185. Similarly, MDS 194 may be coupled to SCU 130 via another RF link 186. In a like manner, CPS 192 may be coupled to HHP 190 via an infra-red link 187; and
15 MDS 194 may be coupled to HHP 190 via another infra-red link 188. Other types of telecommunicative links, other than RF or infra-red may also be used for this purpose. Through these links, CPS 192, for example, may be coupled through HHP 190 to SCU 130 for programming or diagnostic purposes. MDS 194 may also be coupled to SCU 130, either directly through RF link 186, or indirectly through the
20 IR link 188, HHP 190, and RF link 185.

In another preferred embodiment, using for example, a BION microstimulator(s) as described in the above referenced patents, and as illustrated in FIG. 7, the patient 200 switches SCU 130 on and off by use of controller 210, which is preferably handheld. Controller 210 operates to control SCU 130 by any of
25 various means, including sensing the proximity of a permanent magnet located in controller 210, or sensing RF transmissions from controller 210.

External components for one preferred embodiment related to programming and providing power to SCU 130 are also illustrated in FIG. 7. When it is required to communicate with SCU 130, patient 200 is positioned on or near
30 external appliance 220, which appliance contains one or more inductive coils 222 or other means of communication (e.g., RF transmitter and receiver). External appliance 220 is connected to or is a part of external electronic circuitry appliance 230 which receives power 232 from a conventional power source. External appliance 230 contains manual input means 238, e.g., a keypad, whereby

- 18 -

the patient 200 or a caregiver 242 may request changes in the parameters of the electrical and/or drug stimulation produced during the normal operation of SCU 130. In this preferred embodiment, manual input means 238 includes various electro-mechanical switches and visual display devices that provide the patient and/or
5 caregiver with information about the status and prior programming of SCU 130.

Alternatively or additionally, external electronic appliance 230 is preferably provided with an electronic interface means 246 for interacting with other computing means 248, such as by a serial interface cable or infrared link to a personal computer or to a telephone modem. Such interface means 246 thus
10 permits a clinician to monitor the status of the implant and prescribe new stimulation parameters from a remote location.

The external appliance(s) may advantageously be embedded in a cushion, pillow, or hat. Other possibilities exist, including a head band or other structure that may be affixed to the patient's body or clothing.

15 In order to help determine the strength and/or duration of electrical stimulation and/or the amount and/or type(s) of stimulating drug(s) required to produce the desired effect, in one preferred embodiment, a patient's response to and/or need for treatment is sensed. For example, when electrodes and/or catheters of SCU 130 are implanted in or near the dorsal raphe nucleus 110, signals from a
20 serotonin level sensor built into SCU 130 may be recorded. (As used herein, "near" means as close as reasonably possible to targeted tissue, including touching or even being positioned within the tissue, but in general, may be as far as about 150 mm from the target tissue.)

Alternatively, an "SCU" dedicated to sensory processes
25 communicates with an SCU that provides the stimulation pulses. The implant circuitry 170 may, if necessary, amplify and transmit these sensed signals, which may be digital or analog. Other methods of determining the required electrical and/or drug stimulation include measuring the electrical activity of a neural population (e.g., EEG), measuring neurotransmitter levels and/or their associated
30 breakdown product levels, measuring medication and/or other drug levels, hormone levels, and/or levels of any other bloodborne substance(s), changes in one or more of these, other methods mentioned herein, and others that will be evident to those of skill in the field upon review of the present disclosure. The sensed information is

- 19 -

preferably used to control the stimulation parameters of the SCU(s) in a closed-loop manner.

For instance, in one embodiment of the present invention, a first and second "SCU" are provided. The second "SCU" periodically (e.g. once per minute) records serotonin levels (or the level of some other substance, or an amount of electrical activity, etc.), which it transmits to the first SCU. The first SCU uses the sensed information to adjust electrical and/or drug stimulation parameters according to an algorithm programmed, e.g., by a physician. For example, the amplitude of electrical stimulation may be increased in response to decreased serotonin levels. More preferably, one SCU performs both the sensing and stimulating functions.

While an SCU 130 may also incorporate means of sensing symptoms or other prognostic or diagnostic indicators of mood and/or anxiety disorders, e.g., via levels of a neurotransmitter or hormone, it may alternatively or additionally be desirable to use a separate or specialized implantable device to record and telemeter physiological conditions/responses in order to adjust electrical stimulation and/or drug infusion parameters. This information may be transmitted to an external device, such as external appliance 220, or may be transmitted directly to implanted SCU(s) 130. However, in some cases, it may not be necessary or desired to include a sensing function or device, in which case stimulation parameters are determined and refined, for instance, by patient feedback.

Thus, it is seen that in accordance with the present invention, one or more external appliances are preferably provided to interact with SCU 130 to accomplish one or more of the following functions:

Function 1: If necessary, transmit electrical power from the external electronic appliance 230 via appliance 220 to SCU 130 in order to power the device and/or recharge the power source/storage device 180. External electronic appliance 230 may include an automatic algorithm that adjusts electrical and/or drug stimulation parameters automatically whenever the SCU(s) 130 is/are recharged.

Function 2: Transmit data from the external appliance 230 via the external appliance 220, if necessary, to SCU 130 in order to change the parameters of electrical and/or drug stimulation produced by SCU 130.

Function 3: Transmit sensed data indicating a need for treatment or in response to stimulation from SCU 130 (e.g., impedance, electrical activity of

- 20 -

a neural population (e.g., EEG), neurotransmitter levels, levels of neurotransmitter breakdown products, medication levels, hormone levels, or other activity) to external appliance 230 via external appliance 220.

Function 4: Transmit data indicating state of the SCU 130 (e.g., battery level, drug level, electrical stimulation and/or infusion settings, etc.) to external appliance 230 via external appliance 220.

By way of example, a treatment modality for depression is carried out according to the following sequence of procedures:

- 10 1 An SCU 130 is implanted so that its electrodes 152 and/or catheter discharge portion 162 are located in or near the dorsal raphe nucleus 110. If necessary or desired, electrodes 152' and/or catheter discharge portion(s) 162' may additionally or alternatively be located in or near the anterior cingulate gyrus.
- 15 2 Using Function 2 described above (i.e., transmitting data) of external electronic appliance 230 and external appliance 220, SCU 130 is commanded to produce a series of excitatory electrical stimulation pulses, possibly with gradually increasing amplitude, and possibly while infusing gradually increasing amounts of an excitatory neurotransmitter, e.g., glutamate.
- 20 3. After each stimulation pulse, or at some other predefined interval, any change in neurotransmitter level or electrical activity of a neural population (e.g., EEG) resulting from the electrical and/or drug stimulation is sensed, preferably by one or more electrodes 152 and/or 152'. These responses are converted to data and telemetered out to external electronic appliance 230 via Function 3.
- 25 4. From the response data received at external appliance 230 from SCU 130, the stimulus threshold for obtaining a response is determined and is used by a clinician 242 acting directly 238 or by other computing means 248 to transmit the desired electrical and/or drug stimulation parameters to SCU 130 in accordance with Function 2.
- 30 5. When patient 200 desires to invoke electrical stimulation and/or drug infusion, patient 200 employs controller 210 to set SCU 130 in a state

- 21 -

where it delivers a prescribed stimulation pattern from a predetermined range of allowable stimulation patterns.

6. To cease electrical and/or drug stimulation, patient 200 employs controller 210 to turn off SCU 130.
- 5 7. Periodically, the patient or caregiver recharges the power source/storage device 180 of SCU 130, if necessary, in accordance with Function 1 described above (i.e., transmit electrical power).

For the treatment of any of the various types and levels of mood
 10 and/or anxiety disorders, it may be desirable to modify or adjust the algorithmic functions performed by the implanted and/or external components, as well as the surgical approaches, in ways that would be obvious to skilled practitioners of these arts. For example, it may be desirable to employ more than one SCU 130, each of which could be separately controlled by means of a digital address. Multiple
 15 channels and/or multiple patterns of electrical and/or drug stimulation might thereby be programmed by the clinician and controlled by the patient in order to deal with complex or multiple symptoms or dysfunctions, such as a mood disorder comorbid with an anxiety disorder.

In one preferred embodiment, SCU 130, or a group of two or more
 20 SCUs, is controlled via closed-loop operation. A need for and/or response to stimulation is sensed via SCU 130, or by an additional SCU (which may or may not be dedicated to the sensing function), or by another implanted or external device.

If necessary, the sensed information is transmitted to SCU 130. Preferably, the parameters used by SCU 130 are automatically adjusted based on
 25 the sensed information. Thus, the electrical and/or drug stimulation parameters are adjusted in a closed-loop manner to provide stimulation tailored to the need for and/or response to the electrical and/or drug stimulation.

According to another preferred embodiment of the invention, the electrical and/or drug stimulation increases excitement of one or more of those areas
 30 of the brain that exhibit chronic decreased activity in patients with mood and/or anxiety disorders relative to psychiatrically normal control subjects. Such excitatory stimulation is likely to be produced by low-frequency electrical stimulation (e.g., less than about 50-100 Hz), an excitatory neurotransmitter agonist(s) (e.g., norepinephrine, epinephrine, glutamate, acetylcholine, serotonin, dopamine), an

- 22 -

agonist thereof, an inhibitory neurotransmitter antagonist(s) (e.g., bicucilline), an agent that increases the level of an excitatory neurotransmitter (e.g., edrophonium, Mestinin), and/or an agent that decreases the level of an inhibitory neurotransmitter. Therefore, as described above, stimulation may be applied to one or more of the
5 anterior cingulate gyrus, dorsal prefrontal cortex (especially the left dorsolateral prefrontal cortex), the dorsal and/or median raphe nuclei, and/or the locus coeruleus.

According to yet another preferred embodiment of the invention, the electrical and/or drug stimulation decreases excitement of one or more of those areas of the brain that exhibit chronic *increased* activity in patients with mood and/or
10 anxiety disorders relative to psychiatrically normal control subjects. Such inhibitory stimulation is likely to be produced by high-frequency electrical stimulation (e.g., greater than about 50-100 Hz), an inhibitory neurotransmitter agonist(s) (e.g., dopamine, glycine, GABA), an agonist thereof, an excitatory neurotransmitter antagonist(s) (e.g., prazosin, metoprolol), an agent that increases the level of an
15 inhibitory neurotransmitter, an agent that decreases the level of an excitatory neurotransmitter, and/or a local anesthetic agent (e.g., lidocaine) is likely to produce such inhibition. Thus, stimulation may also/instead be applied to one or more of the ventral prefrontal cortex, the cerebellar vermis, the amygdala, the orbitofrontal cortex, the caudate nucleus, the medial thalamus, and/or other areas of the
20 thalamus.

In yet another alternative, sensing means described earlier may be used to orchestrate first the activation of SCU(s) targeting one or more areas of the brain, and then, when appropriate, the SCU(s) targeting another area and/or by a different means. Alternatively, this orchestration may be programmed, and not
25 based on a sensed condition.

Thus, the present invention provides systems and methods for the treatment, control, and/or prevention of mood and/or anxiety disorders that utilize one or more compact, relatively inexpensive SCUs. The implant site results in a relatively simple procedure, with the associated advantages in terms of reduced
30 surgical time, expense, possible error, and opportunity for infection and other complications. Other advantages, *inter alia*, of the present invention include the system's monitoring and programming capabilities, the power source, storage, and transfer mechanisms, the activation of the device by the patient or clinician, the

- 23 -

system's open-loop capabilities and closed-loop capabilities coupled with sensing a need for and/or response to treatment, and coordinated use of one or more SCUs.

While the invention herein disclosed has been described by means of specific embodiments and applications thereof, numerous modifications and
5 variations could be made thereto by those skilled in the art without departing from the scope of the invention set forth in the claims.

- 24 -

CLAIMS

What is claimed is:

- 5 1. An implantable apparatus, comprising:
 at least one system control unit (130) configured for implantation
entirely within at least one of a brain or a skull;
 at least one of a pump (165) coupled to a catheter (160) or at least
two stimulating electrodes (152), the catheter having a discharge portion (162);
10 means for operably connecting (154) the at least one system control
unit to at least one of the catheter or the electrodes;
 means for providing operating power (180) to the at least one system
control unit;
 means for providing stimulation parameters (230) to the at least one
15 system control unit; and
 means for generating stimulation pulses (170) in accordance with the
stimulation parameters;
 wherein the pump and catheter and the electrodes are configured to
deliver the stimulation pulses through at least one of the catheter or the electrodes to
20 at least one area of the brain affecting mood and/or anxiety disorders.
2. An implantable apparatus, comprising:
 at least one catheter (160) configured to deliver a stimulating drug
through a discharge portion (162) to at least one area of the brain affecting mood
25 and/or anxiety disorders; and
 at least one system control unit (130) having a size and shape
suitable for implantation into at least one of the skull or the brain, wherein the at least
one system control unit comprises:
 a connector (154) for connecting the system control unit and
30 the at least one catheter;
 a pump (165) for storing and delivering stimulation pulses of
the stimulating drug to the at least one catheter and thus to tissue
adjacent to the discharge portion of the at least one catheter;

- 25 -

electronic circuitry (170) that generates stimulation pulses in accordance with prescribed stimulation parameters, which electronic circuitry is operable connected to the pump;
programmable memory (175) for receiving and storing the
5 prescribed stimulation parameters; and
a power source (180) for providing operating power to the electronic circuitry;
wherein the system further comprises at least one external
appliance (230) for transmitting the prescribed parameters and power to the system
10 control unit.

3. An implantable apparatus for applying electrical stimulation to a brain, comprising:
at least one system control unit (130) configured for implantation
15 entirely within a brain;
at least two stimulating electrodes (152) operably connected to the at least one system control unit;
means for providing operating power (180) to the at least one system control unit;
20 means for providing stimulation parameters (230) to the at least one system control unit; and
means for generating electrical stimulation pulses (170) in accordance with the stimulation parameters;
wherein the at least two stimulating electrodes are configured to
25 deliver the stimulation pulses through at least one of the electrodes to at least one area of the brain.

4. The implantable apparatus of any of the preceding Claims further comprising at least one sensor for sensing at least one of change or level of
30 serotonin, change or level of electrical activity of a neural population, change or level of a neurotransmitter, change or level of a neurotransmitter breakdown product, change or level of a drug, change or level of a hormone, and change or level of impedance.

- 26 -

5. The implantable apparatus of Claim 4 wherein the stimulation parameters are adjusted based on the sensed condition.
6. The implantable apparatus of Claim 1 or 2 wherein the system control unit is configured to conform to the profile of the skull.
7. The implantable apparatus of any of Claims 1 to 3 wherein the system control unit is a microstimulator implanted entirely within the brain.
8. The implantable apparatus of Claim 1 or 2 wherein the pump and catheter are configured to deliver a drug that increases excitement of one or more of those areas of the brain that exhibit chronic decreased activity.
9. The implantable apparatus of Claim 8 wherein the pump and catheter are further configured to deliver at least one of an excitatory neurotransmitter agonist, an inhibitory neurotransmitter antagonist, and a medication that increases levels of at least one excitatory neurotransmitter into the area of decreased activity.
10. The implantable apparatus of Claim 9 wherein the at least one catheter is configured to infuse at least one area of the brain, wherein said area is selected from the anterior cingulate gyrus, the dorsal prefrontal cortex, the dorsal raphe nuclei, the median raphe nuclei, and the locus coeruleus.
11. The implantable apparatus of Claim 1 or 2 wherein the pump and catheter are configured to deliver a drug that decreases excitement of one or more of those areas of the brain that exhibit chronic increased activity.
12. The implantable apparatus of Claim 11 wherein the pump and catheter are further configured to deliver at least one of an inhibitory neurotransmitter agonist, an excitatory neurotransmitter antagonist, and a medication that increases the level of an inhibitory neurotransmitter into the area of increased activity.

- 27 -

13. The implantable apparatus of Claim 12 wherein the at least one catheter is configured to infuse at least one area of the brain, wherein said area is selected from the ventral prefrontal cortex, the thalamus, the medial thalamus, the cerebellar vermis, the amygdala, the orbitofrontal cortex, and the caudate nucleus.
- 5
14. The implantable apparatus of Claim 1 or 3 wherein the electronic circuitry is configured to generate stimulation pulses at less than about 50 to 100 Hz.
- 15
- 10 15. The implantable apparatus of Claim 14 wherein the at least two electrodes are configured to apply the stimulation pulses to at least one area of the brain, wherein said area is selected from the anterior cingulate gyrus, the dorsal prefrontal cortex, the dorsal raphe nuclei, the median raphe nuclei, and the locus coeruleus.
- 15
16. The implantable apparatus of Claim 1 or 3 wherein the electronic circuitry is configured to generate stimulation pulses at greater than about 50 to 100 Hz.
- 20
17. The implantable apparatus of Claim 16 wherein the at least two electrodes are configured to apply the stimulation pulses to at least one area of the brain, wherein said area is selected from the ventral prefrontal cortex, the thalamus, the medial thalamus, the cerebellar vermis, the amygdala, the orbitofrontal cortex, and the caudate nucleus.

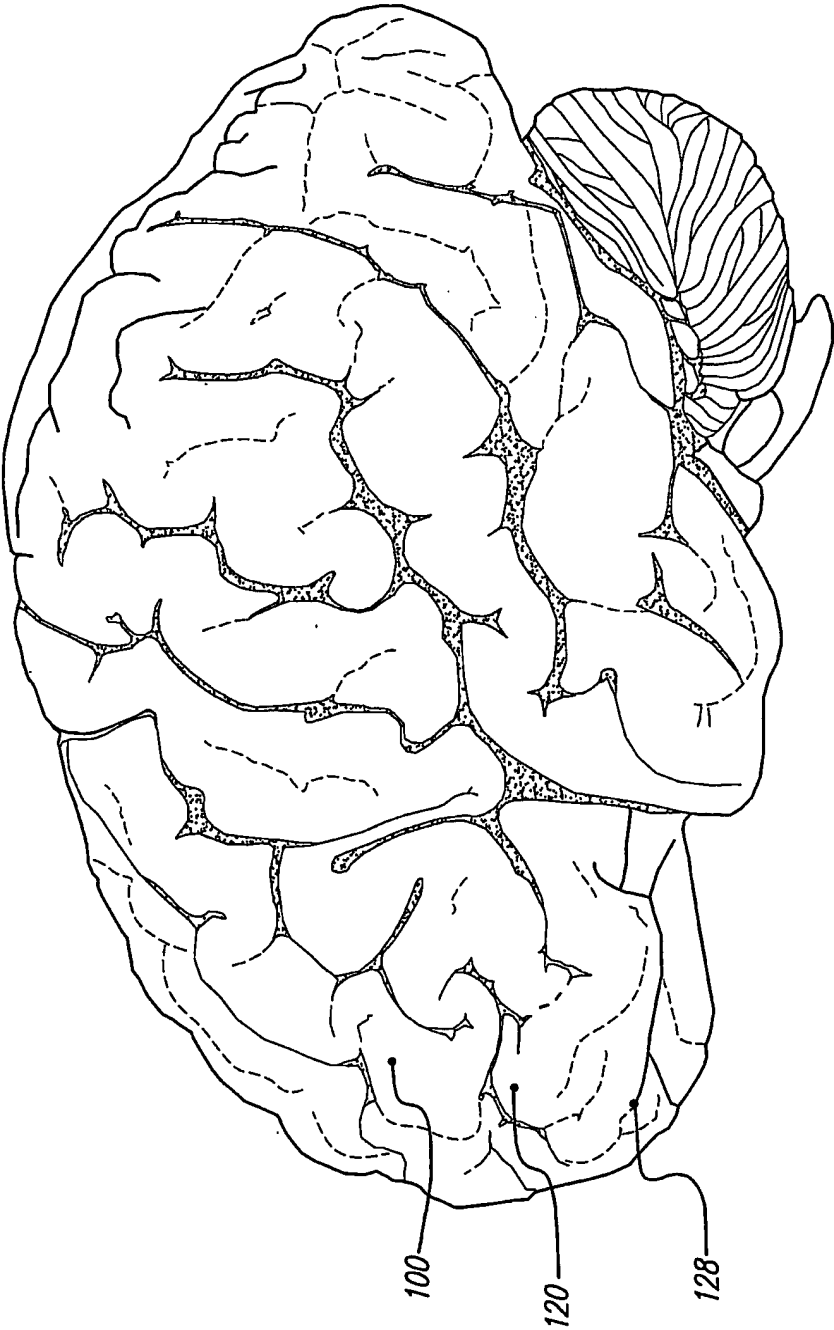


FIG. 1

2/11

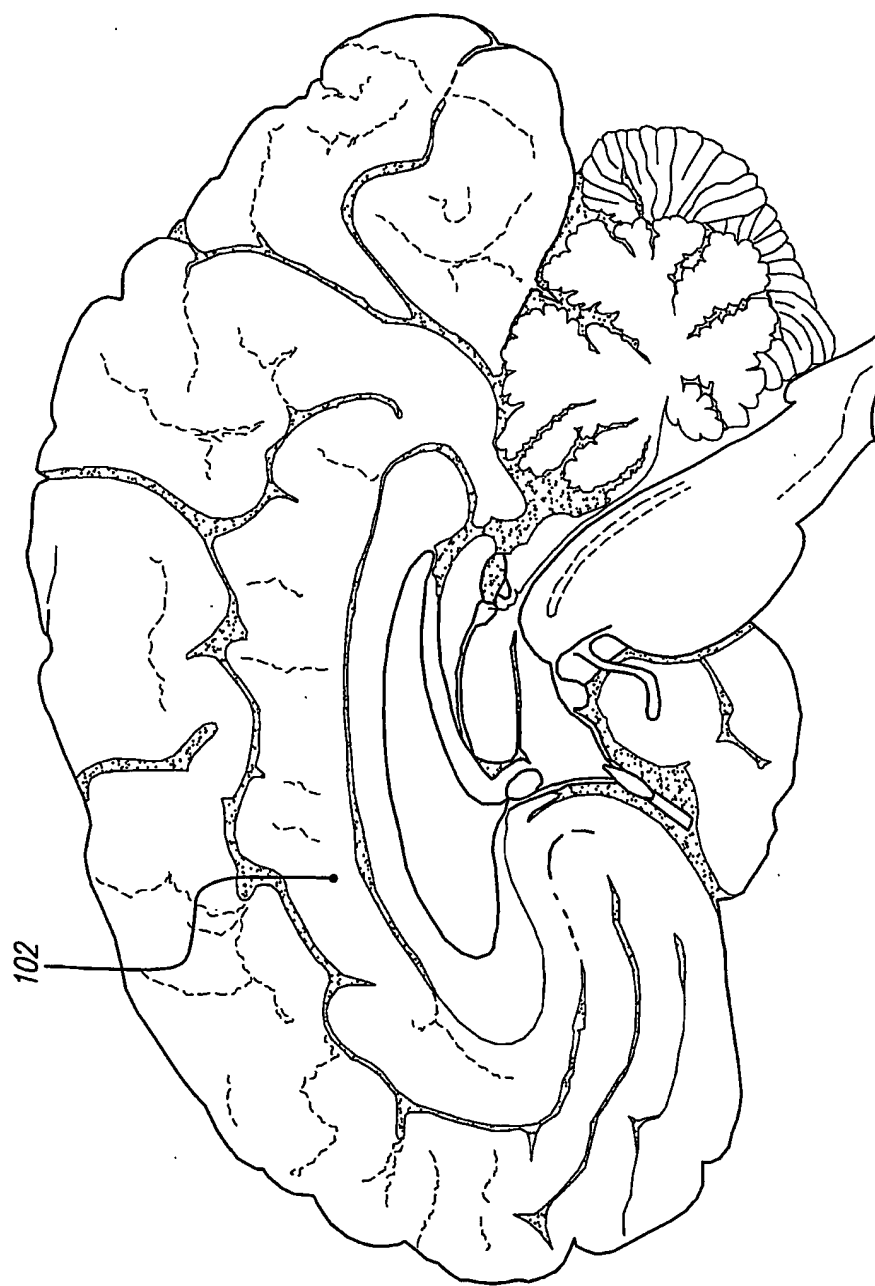


FIG. 2

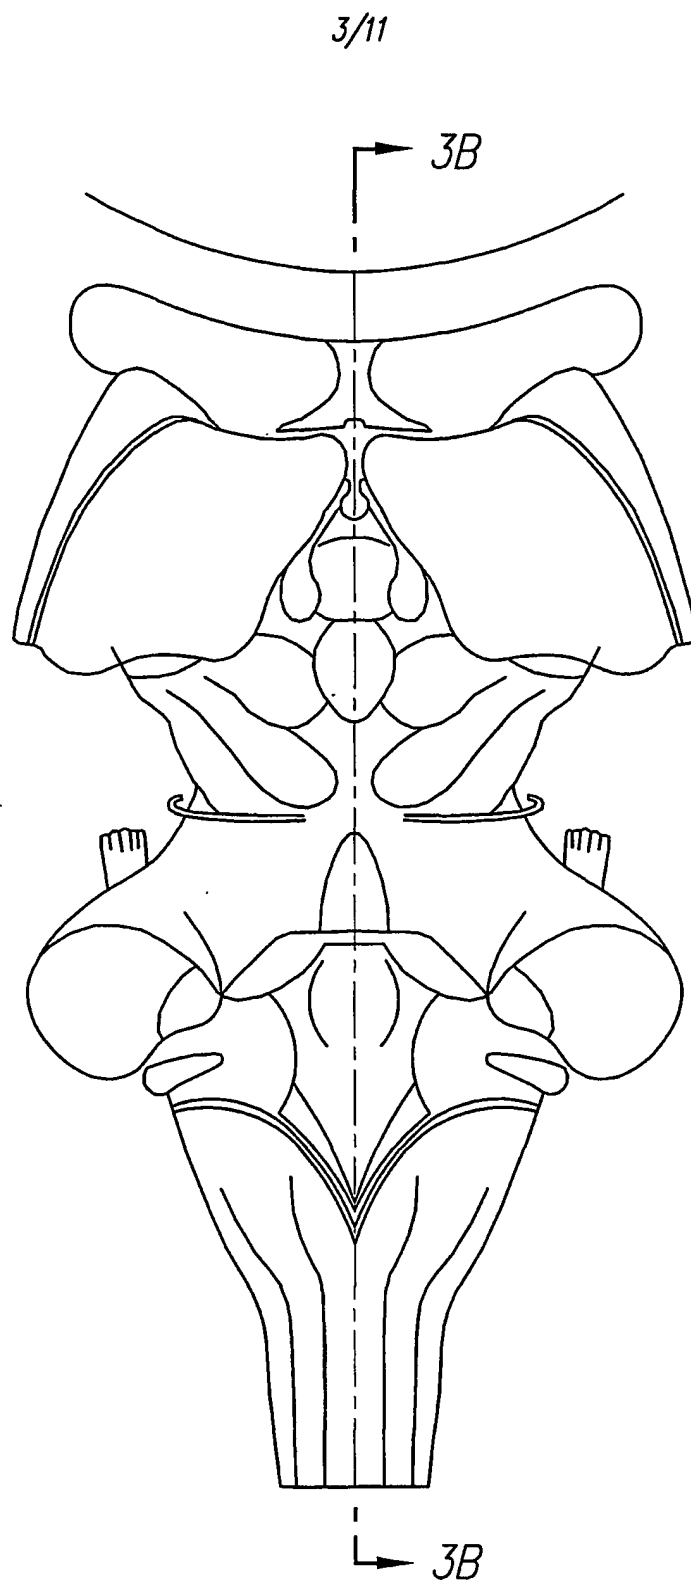


FIG. 3A

4/11

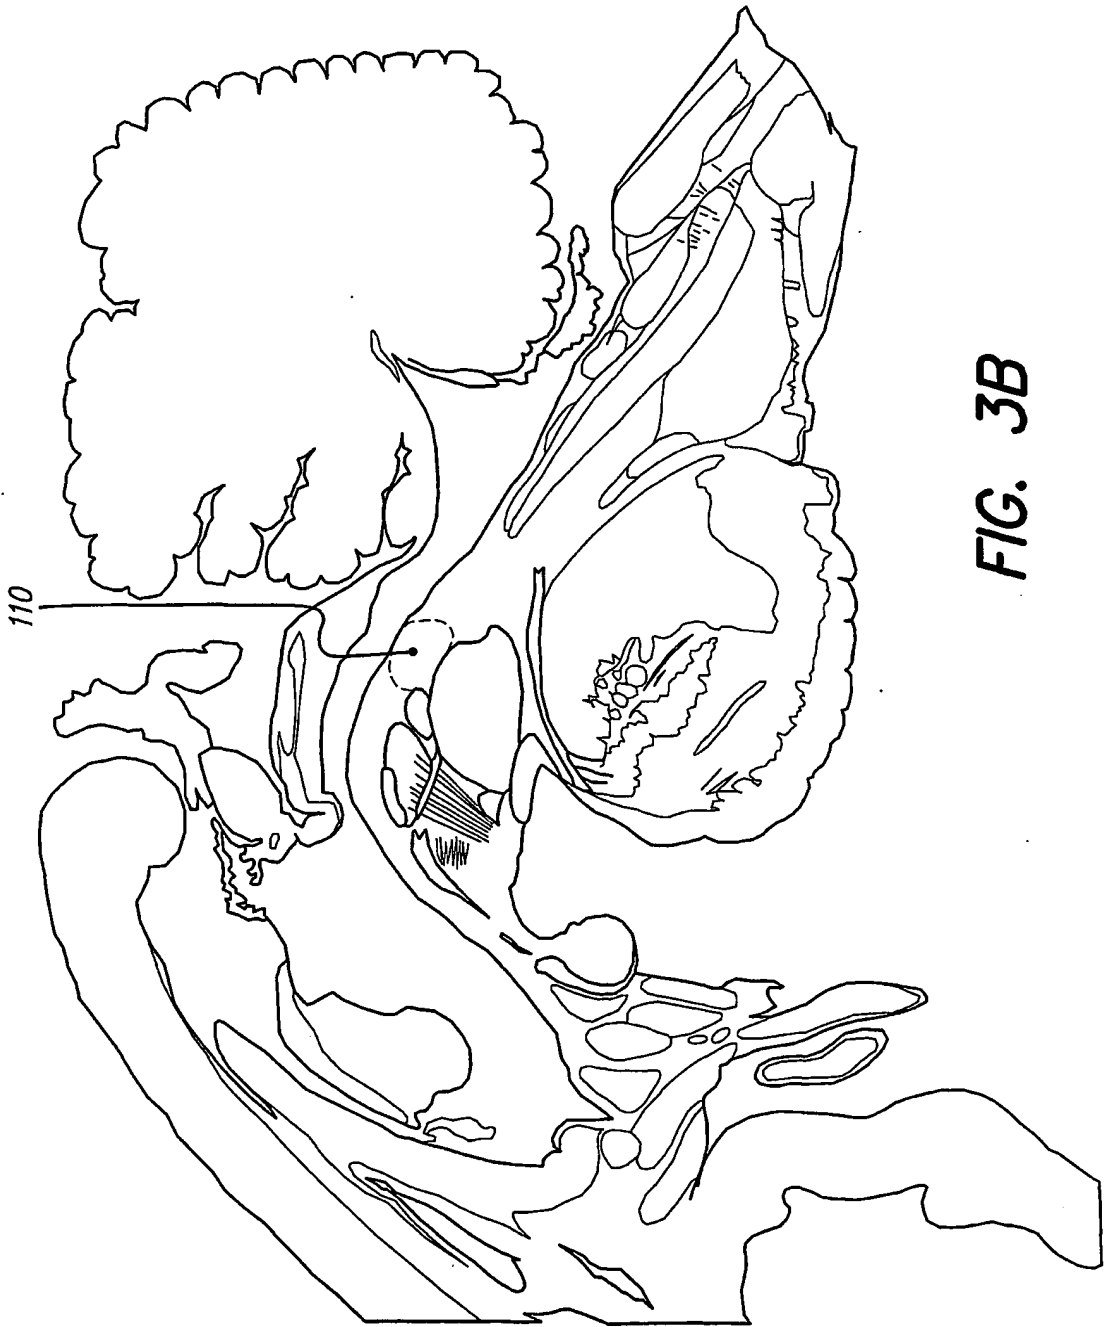


FIG. 3B

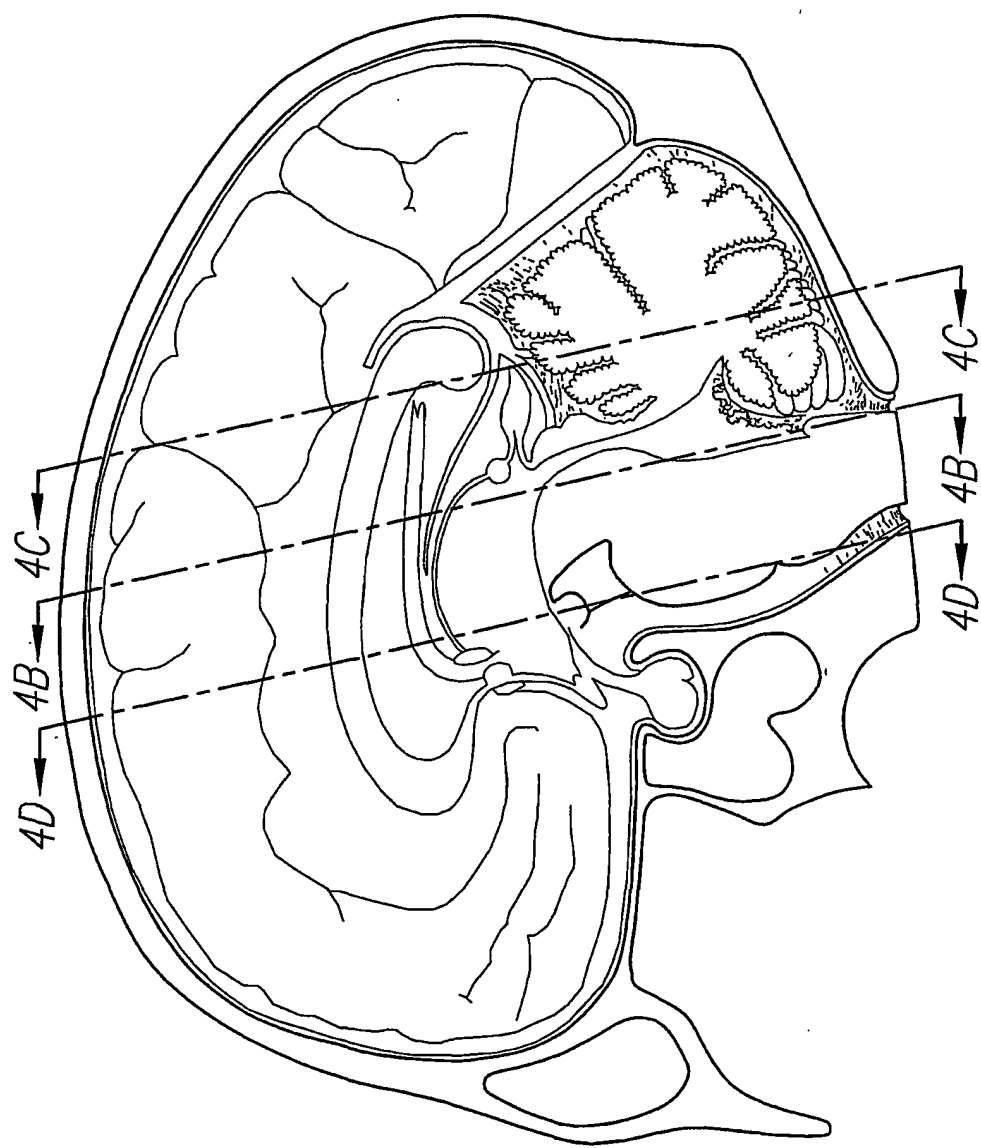


FIG. 4A

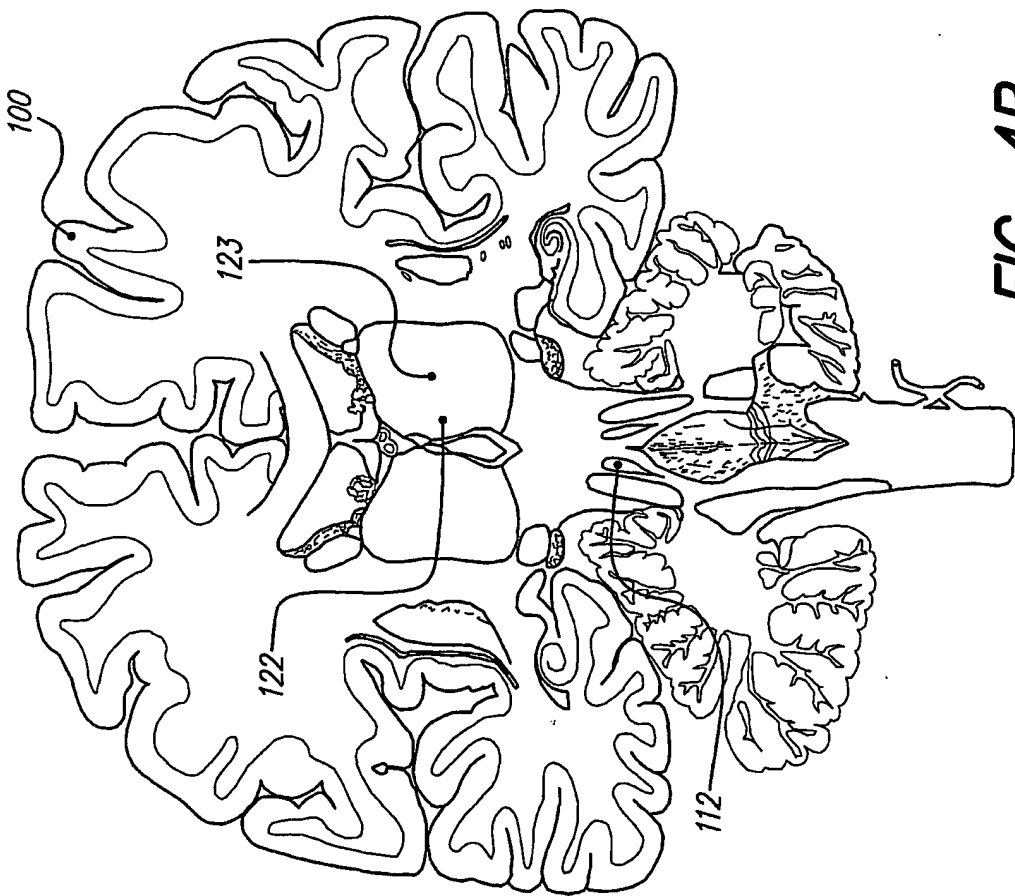


FIG. 4B

7/11

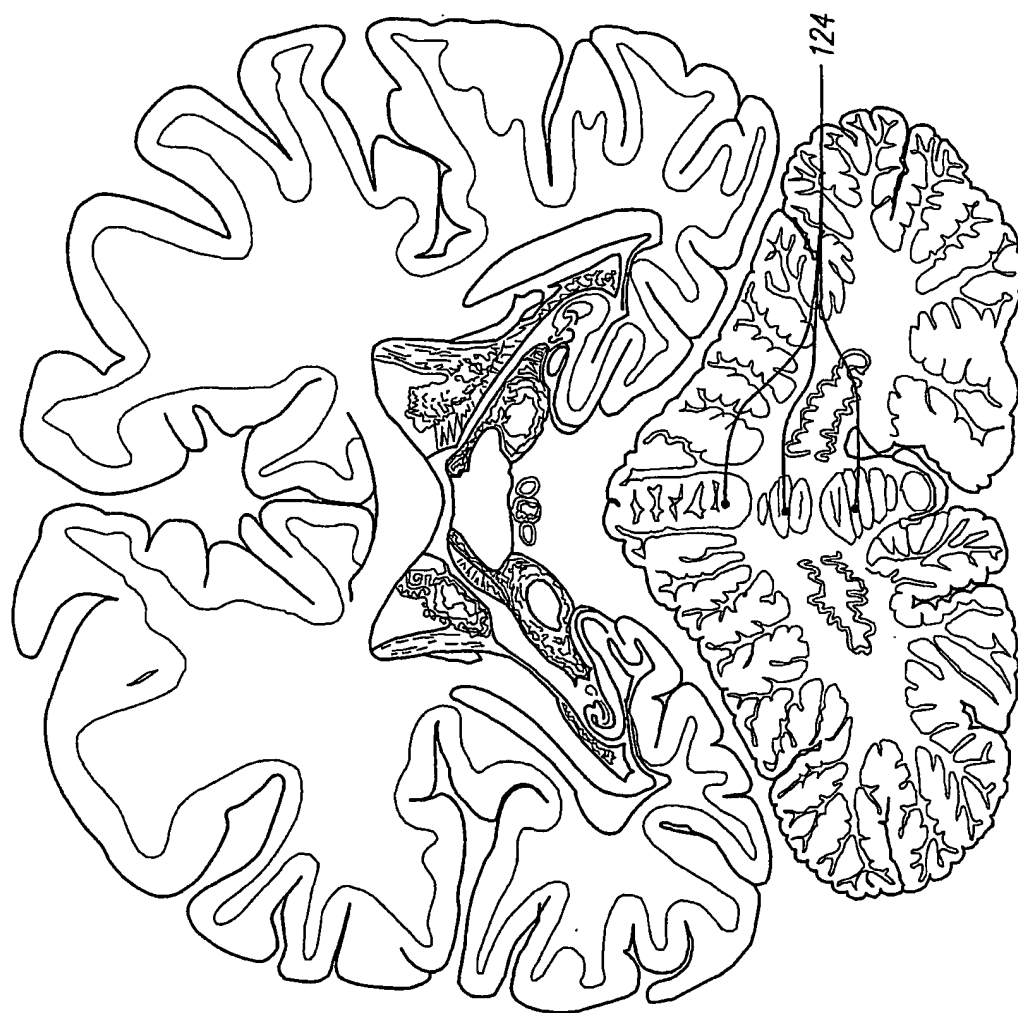


FIG. 4C

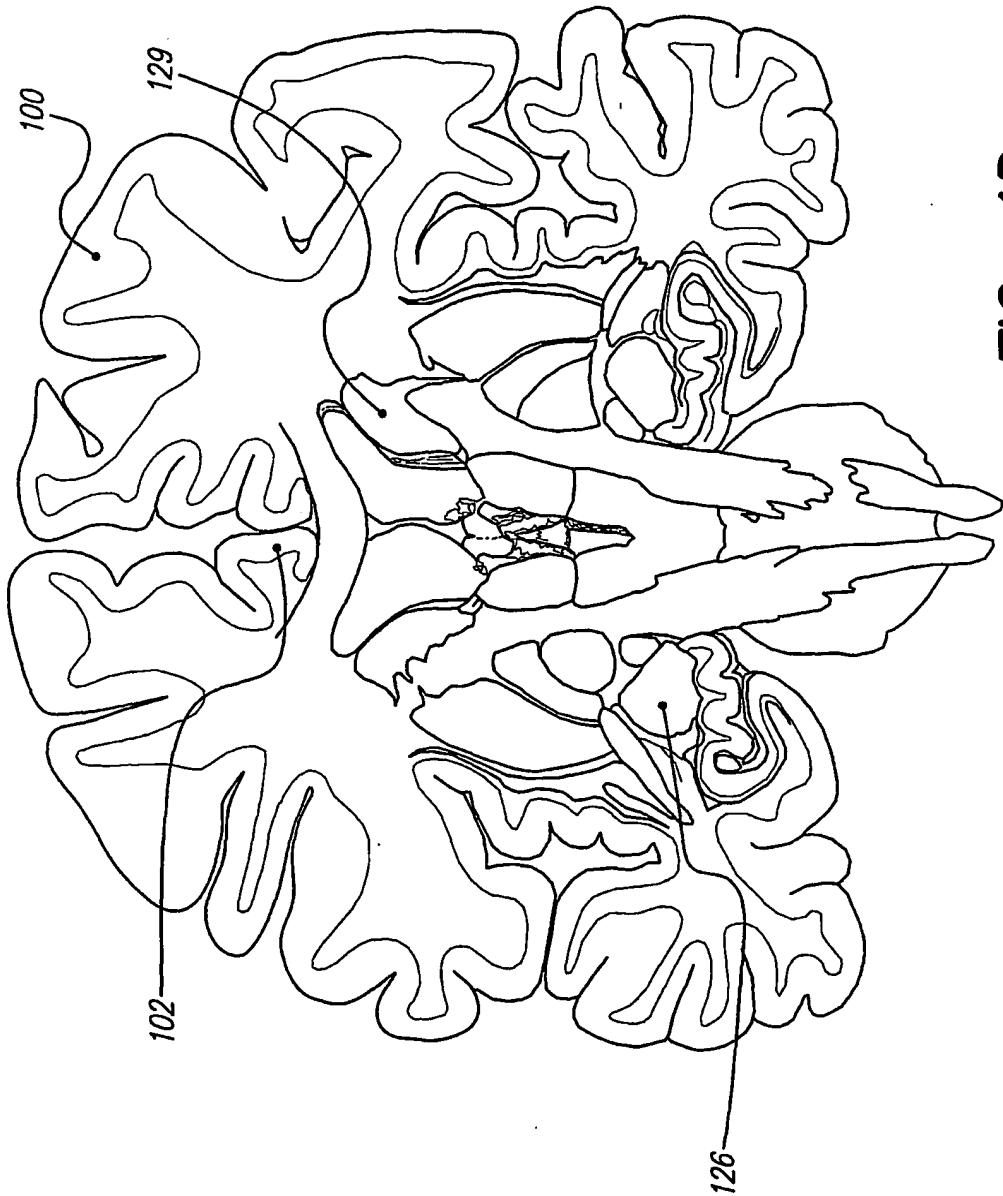


FIG. 4D

9/11

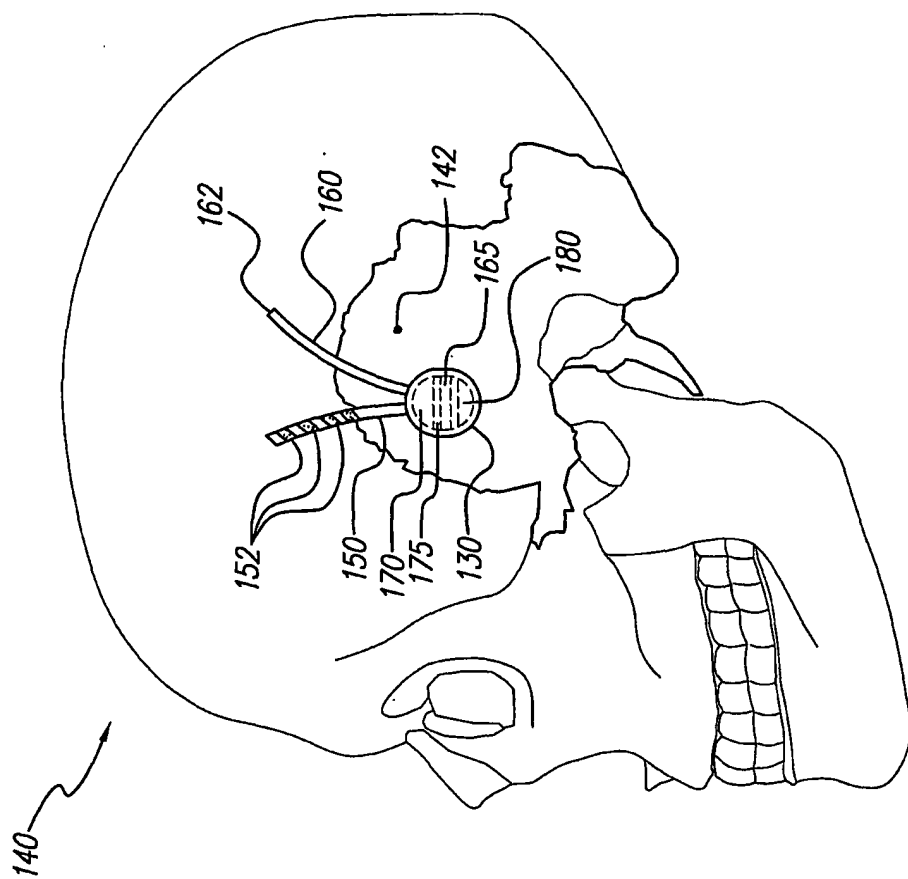
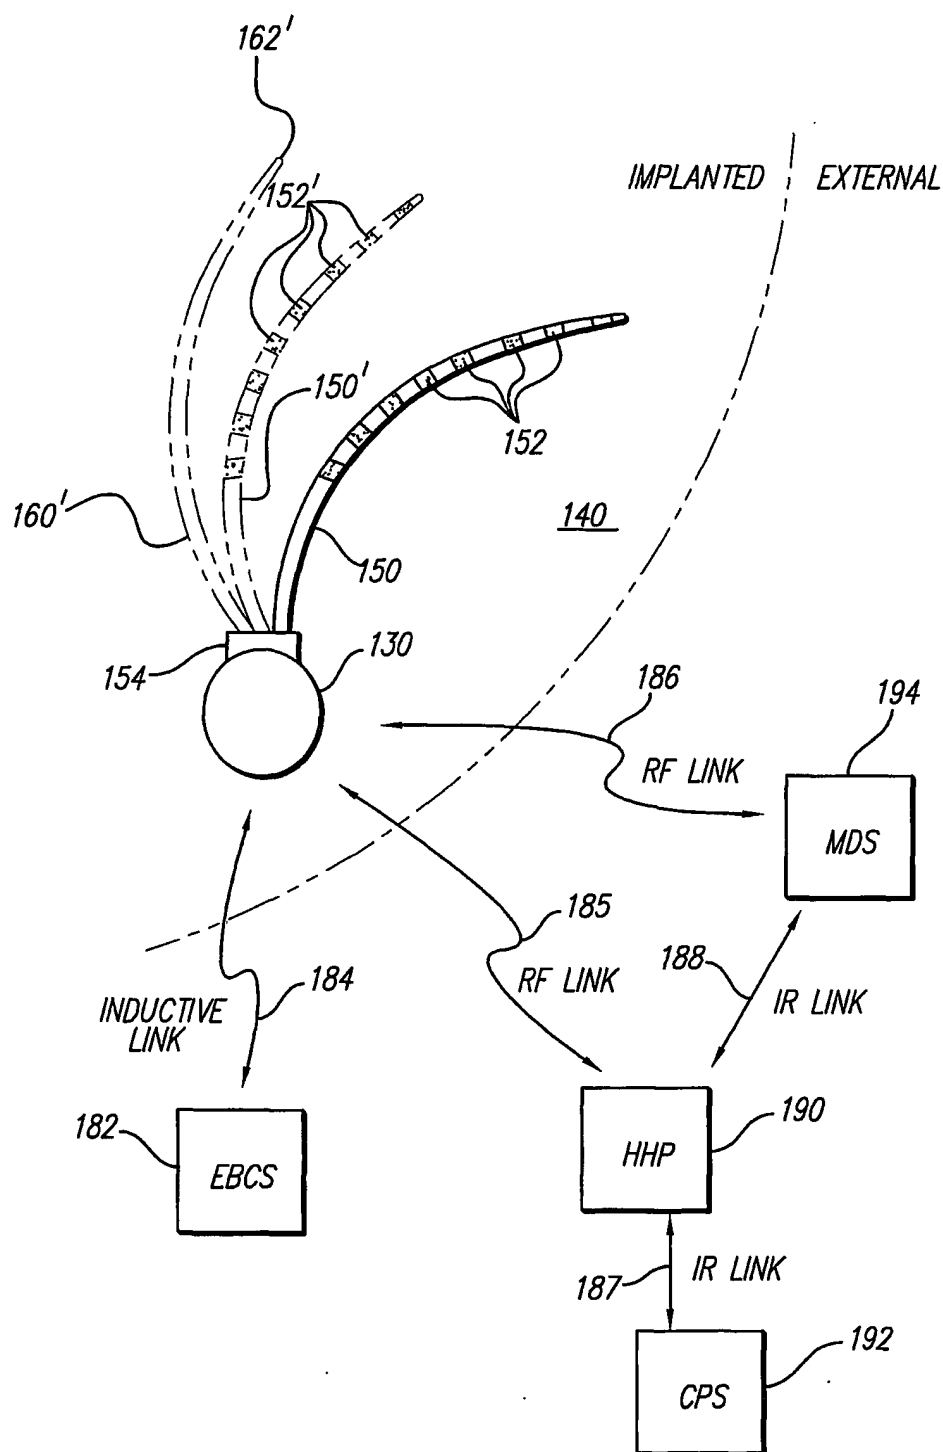


FIG. 5

10/11

**FIG. 6**

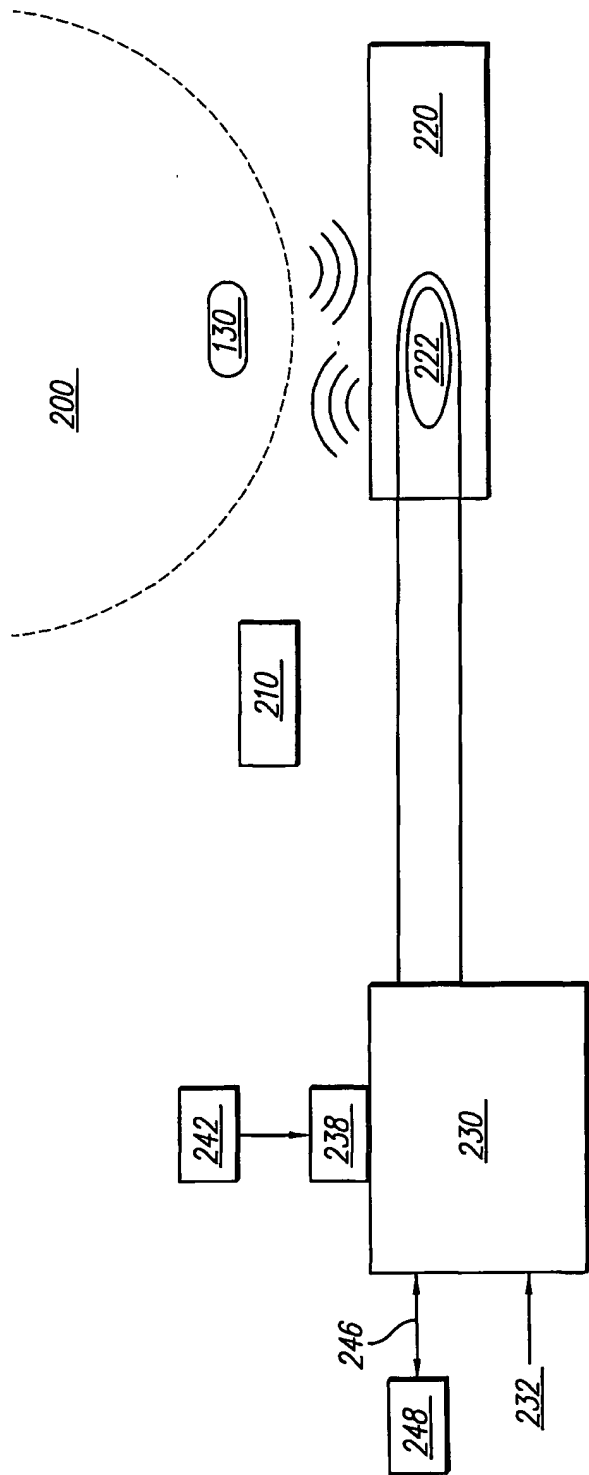


FIG. 7

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/97906 A3

- (51) International Patent Classification⁷: **A61N 1/36** (74) Agent: **GOLD, Bryant, R.**; Advanced Bionics Corporation, 12740 San Fernando Road, Sylmar, CA 91342 (US).
- (21) International Application Number: **PCT/US01/19281**
- (22) International Filing Date: **15 June 2001 (15.06.2001)** (81) Designated States (*national*): **AU, CA, JP.**
- (25) Filing Language: **English** (84) Designated States (*regional*): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- (26) Publication Language: **English**
- (30) Priority Data: **60/212,871** **20 June 2000 (20.06.2000)** **US** Published: **— with international search report**
- (71) Applicant: **ADVANCED BIONICS CORPORATION** (88) Date of publication of the international search report: **28 March 2002**
[US/US]; 12740 San Fernando Road, Sylmar, CA 91342 (US).
- (72) Inventor: **WHITEHURST, Todd, K.**; 4454 Vista del Monte Avenue, #9, Sherman Oaks, CA 91403 (US).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **APPARATUS FOR TREATMENT OF MOOD AND/OR ANXIETY DISORDERS BY ELECTRICAL BRAIN STIMULATION AND/OR DRUG INFUSION**

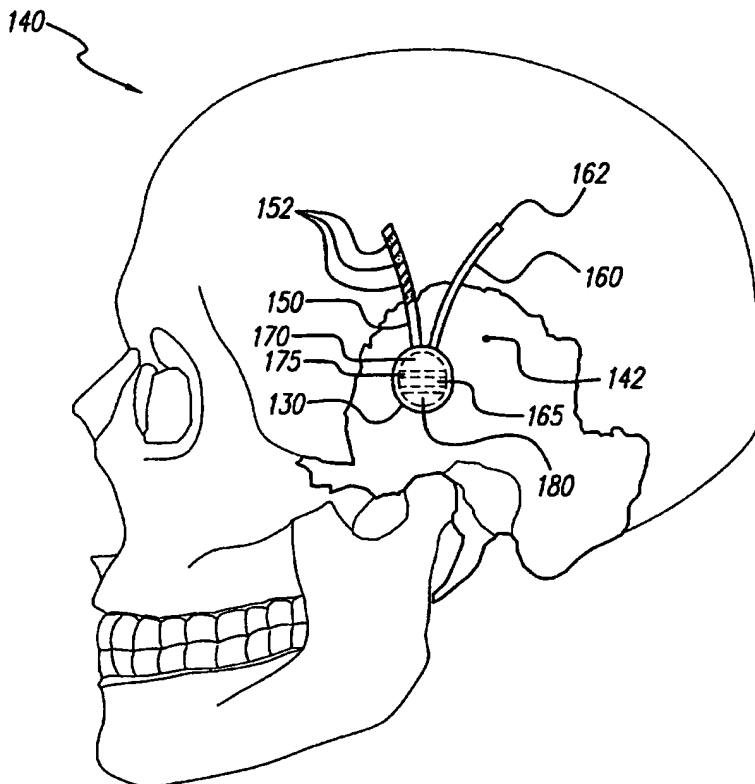

(57) Abstract: Apparatus for introducing one or more stimulating drugs and/or applying electrical stimulation to the brain to treat mood and/or anxiety disorders uses an implantable system control unit (SCU) (130), specifically an implantable signal/pulse generator (IPG) or microstimulator with two or more electrodes (152) in the case of electrical stimulation, and an implantable pump (165) with one or more catheters (160) in the case of drug infusion. In cases requiring both electrical and drug stimulation, one or more SCUs are used. Alternatively and preferably, when needed, an SCU provides both electrical stimulation and one or more stimulating drugs. In a preferred embodiment, the system is capable of open- and closed-loop operation. In closed-loop operation, at least one SCU includes a sensor, and the sensed condition is used to adjust stimulation parameters.

WO 01/97906 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/19281

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61N1/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 975 085 A (RISE MARK T) 2 November 1999 (1999-11-02) cited in the application column 5, line 10 -column 9, line 30 ---	1-17
Y	US 6 061 593 A (UPTON ADRIAN R M ET AL) 9 May 2000 (2000-05-09) abstract column 1, line 11 - line 20 column 2, line 43 -column 3, line 10 column 5, line 52 -column 6, line 55 ---	1-6,8-17
Y	WO 87 07511 A (ZION EDUCATIONAL FOUND) 17 December 1987 (1987-12-17) the whole document --- -/--	7

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

13 December 2001

Date of mailing of the international search report

20/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Ferrigno, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/19281

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 21591 A (UNIV IOWA RES FOUND) 17 August 1995 (1995-08-17) page 40, line 26 -page 42, line 10 ----	1-3
A	WO 94 00188 A (CYBERONICS INC) 6 January 1994 (1994-01-06) the whole document ----	1-3
A	US 5 405 367 A (SCHULMAN JOSEPH H ET AL) 11 April 1995 (1995-04-11) the whole document -----	7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/19281

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5975085	A	02-11-1999	NONE	
US 6061593	A	09-05-2000	US 6016449 A EP 0911061 A2 US 6128538 A US 6134474 A	18-01-2000 28-04-1999 03-10-2000 17-10-2000
WO 8707511	A	17-12-1987	AU 601203 B2 AU 7708987 A BR 8707351 A CA 1310069 A1 DK 76088 A EP 0272318 A1 FI 880696 A MC 1859 A NO 880656 A WO 8707511 A2	06-09-1990 11-01-1988 13-09-1988 10-11-1992 14-04-1988 29-06-1988 15-02-1988 19-12-1988 15-04-1988 17-12-1987
WO 9521591	A	17-08-1995	US 5496369 A US 5800535 A US 5697975 A AU 1837695 A EP 0743839 A1 JP 9508553 T WO 9521591 A1 US 6263225 B1 US 5843093 A US 5820588 A US 5735885 A US 5713847 A US 5676655 A US 6129685 A	05-03-1996 01-09-1998 16-12-1997 29-08-1995 27-11-1996 02-09-1997 17-08-1995 17-07-2001 01-12-1998 13-10-1998 07-04-1998 03-02-1998 14-10-1997 10-10-2000
WO 9400188	A	06-01-1994	WO 9400188 A1 AU 2259292 A JP 8500995 T	06-01-1994 24-01-1994 06-02-1996
US 5405367	A	11-04-1995	US 5193540 A US 5358514 A	16-03-1993 25-10-1994